





EXTRACTOR PLUS

DISPENSERS

MBS-1221 Multi Brewer

DISPENSERS



All dispensers **SOLD SEPARATELY**.






BREW BASKETS

Two brew baskets with different color clips — green for tea and brown for coffee — for easy differentiation.



CASCADING SPRAY DOME

Patented design provides even saturation of the coffee bed for maximum extraction. Lime resistant design for fewer service calls.



TRUE BREW TIME

Automatically manage net brew time independent from pre-wet and pulsing functions for easy adjustment of tea and coffee extraction.

EXTRACTOR PLUS

ACCESSORIES

MBS-1221 Multi Brewer

ACCESSORIES, BASKETS AND FILTERS

Item Number	Voltage	Brew Basket	Coffee Capacity	Tea Capacity	Filter Size	Filter SKU	Filter/Case		
NORTH AMERICA									
M1221US-1A117-PM001	120	(2) 13" x 5" Standard Plastic	3.5 oz/100 g	4.0 oz/100 g	13" x 5"	F002	500/cs		
M1221US-1X117-PM001	Dual	(2) 13" x 5" Standard Plastic	3.5 oz/100 g	4.0 oz/100 g	13" x 5"	F002	500/cs		
INTERNATIONAL									
M1221IN-1B130-PM005	200-240	(2) 13" x 5" Standard Plastic	3.5 oz/100 g	4.0 oz/100 g	13" x 5"	F002	500/cs		
M1221NM-1X117-PM001	Dual	(2) 13" x 5" Standard Plastic	3.5 oz/100 g	4.0 oz/100 g	13" x 5"	F002	500/cs		
M1221CE-1B130-PM005	230	(2) 13" x 5" Standard Plastic	3.5 oz/100 g	4.0 oz/100 g	13" x 5"	F002	500/cs		
M1221CE-1B130-PM006	230	(2) 13" x 5" Standard Plastic	3.5 oz/100 g	4.0 oz/100 g	13" x 5"	F002	500/cs		

B014218BN2BK

13" x 5" Coffee Plastic Basket



B014140G2BK

13" x 5" Tea Plastic Basket



F002 13" x 5" Paper Filters



Contact Customer Service or your Sales Person for more options.

WATER FILTRATION SYSTEM

Filtration System	Item Number	Item Description	Rated Capacity	Working Pressure	Weight
Everpure®	A039	In-Line System	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
Everpure®	A075	Replacement Cartridge	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
BWT Bestmax	A138	In-Line System	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A139	Replacement Cartridge	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A140	In-Line System	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A141	Replacement Cartridge	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg

EVERPURE®

In-Line Water Filtration System



SET INCLUDES: 1ea. commercial quality corrosion resistant filter head 1ea. taste and odor filter cartridge (FETCO® #A075) / 1ea. 3/8" x 4' connection hose / 1 set — mounting bracket and hardware.

- Recommended for large-sized operations
- Taste and odor filter for extremely turbid (cloudy) water
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head inlcudes built-in shutoff valve

BWT BESTMAX

In-Line Water Filtration System



SET INCLUDES: 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths

- Recommended for small- to medium-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- $\qquad \qquad \textbf{Durable, corrosion-resistant head inlcudes built-in shutoff valve}$
- Four bypass settings allows for different water qualities and product preferences



TECHNICAL SPECIFICATIONS

MBS-1221 Multi Brewer

NORTH AMERICA

ELECTRICAL										
Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
M1221US-1A117-PM001	13x5" Plastic	120	1 x 1.7 kW	1	2+G	1.7	NEMA 5-15P	14.7	4.4 / 16.7	(E) . (V) us
M1221US-1X117-PM001 DUAL VOLTAGE	13x5" Metal	120 208-240	1 x 1.7 kW 1 x 3.0 kW	1	2+G 2+G	1.7 2.3-3.0	NEMA 5-15P No Cord	14.7 11.3-13.0	4.4 / 16.7 7.0 / 26.5	S c UL us

WATER			
Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
1/4" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	2.66 / 10.07

INTERNATIONAL

ELECTRICAL										
Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
M1221IN-1B130-PM005 ¹	13x5" Plastic	200-240	1 x 3.0 kW	1	2+G	2.1-3.0	CEE 7/7	10.9-13.0	4.4 / 16.7	¶\$3 cŲLus
M1221NM-1X117-PM001 ¹ DUAL VOLTAGE	13x5" Plastic	100-120 200-240	1 x 1.7 kW 1 x 3.0 kW	1	2+G 2+G	1.2-1.7 2.1-3.0	NEMA 5-15P No Cord	12.3-14.7 10.9-13.0	4.4 / 16.7 7.0 / 26.5	NSF NOM
M1221CE-1B130-PM0051	13x5" Plastic	230	1 x 3.0 kW	1	2+G	2.8	CEE 7/7	12.5	7.0 / 26.5	® (€
M1221CE-1B130-PM0061	13x5" Plastic	230	1 x 3.0 kW	1	2+G	2.8	UK1-13P	12.5	7.0 / 26.5	७ (€


WATER									
WaterInlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]						
1/4" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	2.66 / 10.07						




DIMENSIONS

MBS-1221 Multi Brewer

DIMENS	DIMENSIONS & WEIGHT										
	Height (A)	Width (B)	Depth (C)	Faucet Clearance (D)	Brew Basket Clearance (E)	Open She	f Clearance (G)	(H)	Empty Weight [lbs] / [kg]	Filled Weight [lbs] / [kg]	
Product	36.63" 93.04 cm	9.25" 23.50 cm	22" 55.88 cm	30.00" 76.20 cm	22.63" 57.48 cm	11.25" 28.57 cm	12.00" 30.48 cm	14.875" 37.78 cm	37 lbs 16.7 kg	60 lbs 27.2 kg	
Shipping	27.00" 68.60 cm	11.50" 29.20 cm	N/A	N/A	N/A	N/A	N/A	N/A	50 lbs 22.7 kg	N/A	

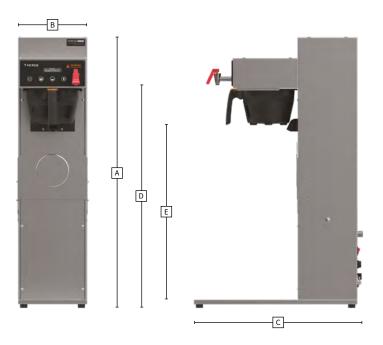





- 2 On/Off
- 3 USB
- 4 Power

