



# IO Fact Sheet



### Color Options

- White
- Custom Color

Wrapping Available at additional cost

### Standard Features

- Single boiler, heat exchange system
- Pre-infusion technology
- Turn style steam knobs
- Raised groups (up to 20oz cup) & barista downlights
- 4 programable, volumetric dosing touch pads (touch sensitive)
- Temperature stabilized groups (thermosiphoned)
- Safety top grate
- Manual pressure stat



## EVD 2

Total Wattage	3,650 watt
Heating Element	3,400 watt
Boiler	10 ltr
Net Weight	138 lbs
Approx Ship Weight	220 lbs
Measurements W x D x H	29.33"x 20.7" x 21.1"
Power	220 volt/16.6 amps




Nema L6-30

### Water Requirements

- 3/8" dedicated cold water line with shut off valve and compression fitting
- water hardness must be between 3-5 grains per gallon or 50-85 ppm
- water softener and/or filter must be installed if it exceeds the limits
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI / 5 BAR

### Drain Requirements

- Open gravity drain of minimum 1.25 inches within 4 feet of the machine

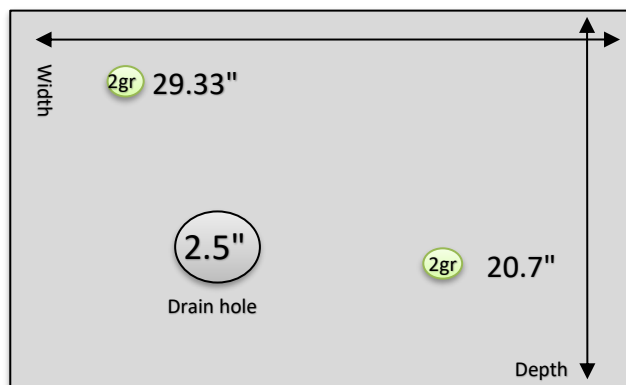

\*Updated 8/2021