



APPLICATIONS

	Hotels
	Commercial Buildings
	Schools & Colleges

Product Description:



Product Description:

This attractive, newly redesigned heavy-duty bollard features full proof aluminum construction housing, providing corrosion and vandal resistance ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotel and parks. A solid foundation withstands the elements, driver options work in even the worst weather conditions.

Features:

- LISTING**
UL and CUL listed for wet locations
- HOUSING**
Consisting of an extruded aluminium alloy body
Standard 4kV Surge
- FINISH**
UV stabilized powder coated finish
- LENS**
High-impact polycarbonate diffuser
- OPTIONS**
Anodized aluminum reflector
Finish - Bronze

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

ORE LIGHTING

LED Manufacturer

LED Bollard


ORE - LLD - BL

ORE LIGHTING

LED Manufacturer

LED Bollard

ORE - LLD - BL

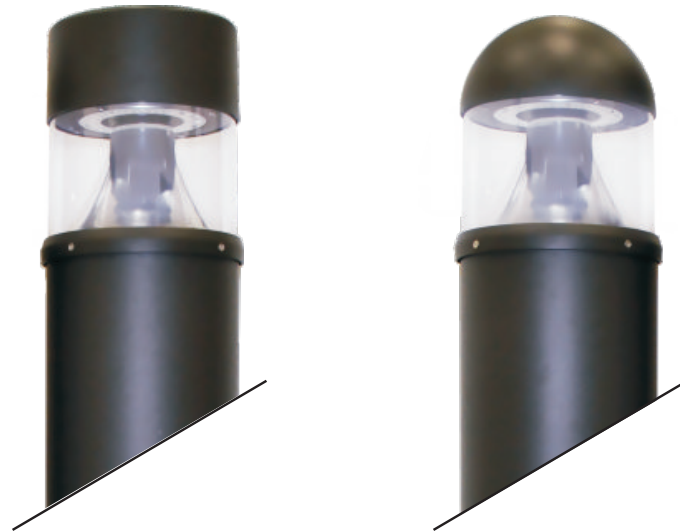

Performance Data

Model NO.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
ORE-LLD-BL	18 W	Type V	2035 lm**	113 lm/W	1	3	2
	36 W	Type V	3960 lm**	110 lm/W	1	3	2

Specification:

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option	Feature	Finish	Starting Temp
ORE-LLD-BL	018=18W	UNV=120-277V	7=70+	40=4000 K	XS= 10kV Surge	C =Cylinder	Bronze	-40°C ~ +50°C
	50=5000 K			2S= 20kV Surge	S =Sphere			


* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.


www.orelighting.com



Dimension:

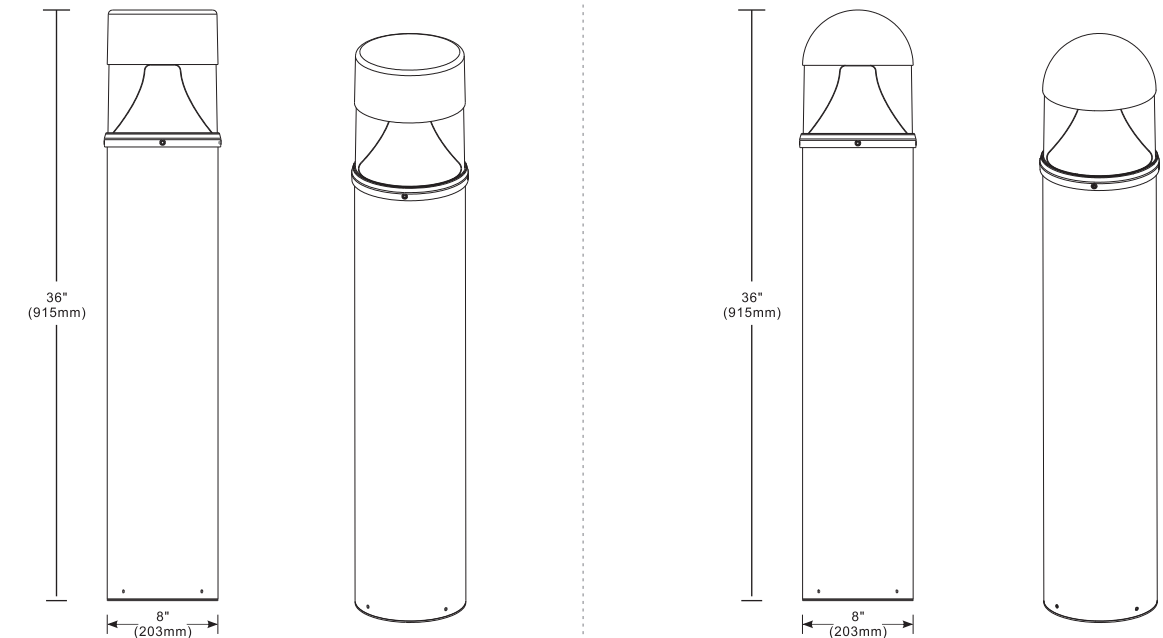

Versatile mounting holes

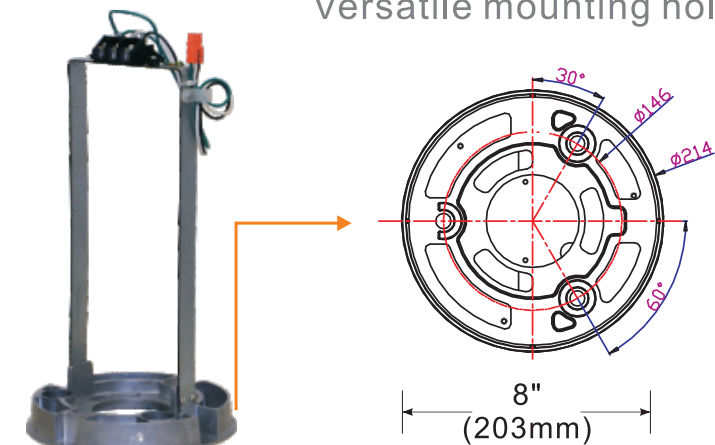

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

www.orelighting.com

