

LED Panel Light



Product description

- Delicately design creates uniform light distribution without hot spots, flicker or glare.
- AL 6063 aluminum frame and PMMA LGP with sophisticated craftsmanship provides magnificent long-lasting light output and elegant appearance.
- 160lm/w LM-80-rated 2835 SMD provides high efficacy to the panel light.
- Power supply efficiency >92%, PF>0.95 Isolated Lifud power supply.
- Approved by cETL No. 5001965, DLC listed, eligible for rebates.


2X2FT:30W 40W



Light Distribution Curve



Structure Features

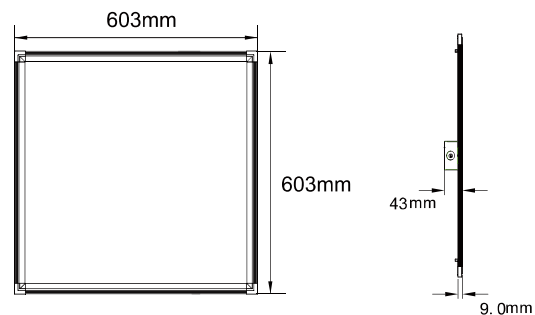

Technical Parameters

Mode	Power	Input Voltage	PF	Light Efficacy	CRI	CCT
ORE-PL4K-30W	30W	AC100-277V	>0.95	110lm/w	RA>80	4000K
ORE-PL4K-40W	40W	AC100-277V	>0.95	110lm/w	RA>80	4000K
ORE-PL5K-30W	30W	AC100-277V	>0.95	130lm/w	RA>80	5000K
ORE-PL5K-40W	40W	AC100-277V	>0.95	130lm/w	RA>80	5000K
Driver	Lighting Angle		Dimmable		Emergency	
LiFuD	180°		0-10V		Emergency lighting	