

# LED Troffer Light




## Product description


- Smooth and comfortable light, no glare.
- High lighting efficiency 140lm/W.
- 0-10V dimming, Ra>80, PF>0.95.
- High quality isolated driver; High driver efficiency>87%.
- Convenient access to retrofit. Ideal for office, retail and other architectural spaces



## Light Distribution Curve

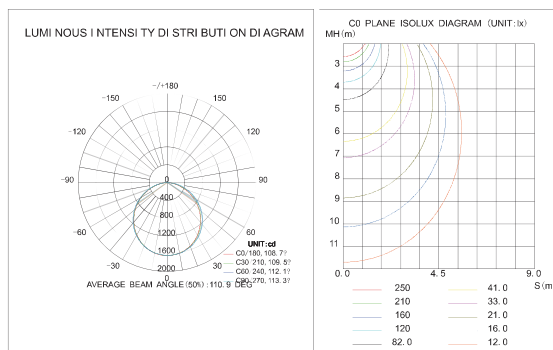

## Structure Features

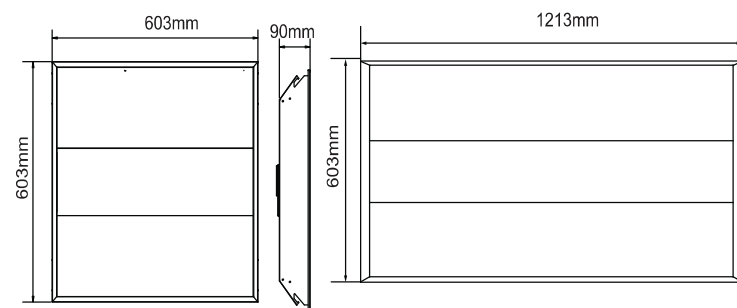

Mode	Size	Power	Input Voltage	PF	Light Efficacy	CRI	CCT
ORE-TR4K-25W	2x2FT	25W	AC100-277V	>0.95	130lm/w	RA>80	3000-5700K
ORE-TR5K-25W	2x2FT	25W	AC100-277V	>0.95	130lm/w	RA>80	3000-5700K
ORE-TR4K-34W	2x4FT	34W	AC100-277V	>0.95	130lm/w	RA>80	3000-5700K
ORE-TR5K-34W	2x4FT	34W	AC100-277V	>0.95	130lm/w	RA>80	3000-5700K
Lighting Angle		Dimmable		Emergency			
120°		0-10V		Emergency lighting			