


mono·mounts®

best for single panel installations

Brass Range		Standard Sizes			Dimensions
Small	Medium	Large	XL	XXL	
12.50mm .49"	15.68mm .62"	18.85mm .74"	25.20mm .99"	31.55mm 1.24"	
15mm .59"	20mm .79"	25mm .98"	30mm 1.18"	35mm 1.38"	
4mm .16"	5mm .20"	6mm .24"	7mm .28"	8mm .31"	

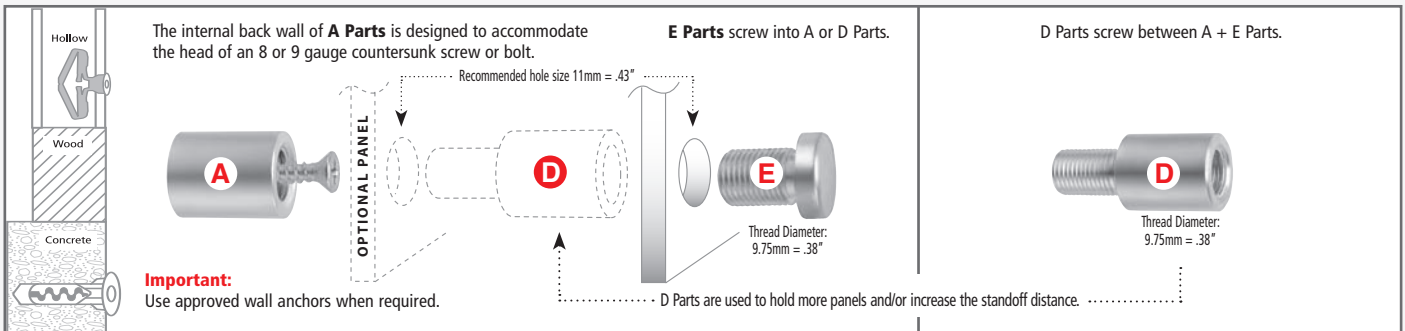

Standard A + E Parts	Maximum Part Capacities		Optional Extra D Parts	
PART ▶	E PARTS		D PARTS	
SIZE	Metric	Imperial	Metric	Imperial
SMALL Max load per part Max panel weight Max panel thickness	18 kgs 36 kgs 4mm	39.6 lbs 79.2 lbs .16"	18 kgs 36 kgs 4mm	39.6 lbs 79.2 lbs .16"
MEDIUM Max load per part Max panel weight Max panel thickness	24 kgs 48 kgs 8mm	52.8 lbs 105.6 lbs .31"	24 kgs 48 kgs 8mm	52.8 lbs 105.6 lbs .31"
LARGE Max load per part Max panel weight Max panel thickness	30 kgs 60 kgs 12mm	66 lbs 132 lbs .47"	30 kgs 60 kgs 12mm	66 lbs 132 lbs .47"
XL Max load per part Max panel weight Max panel thickness	36 kgs 72 kgs 16mm	79.2 lbs 158.4 lbs .63"	36 kgs 72 kgs 16mm	79.2 lbs 158.4 lbs .63"
XXL Max load per part Max panel weight Max panel thickness	42 kgs 84 kgs 19mm	92.4 lbs 184.8 lbs .75"	42 kgs 84 kgs 19mm	92.4 lbs 184.8 lbs .75"
IMPORTANT	<ul style="list-style-type: none"> Maximum load per monomount should not exceed the maximum load per E Part. Maximum total load should not exceed the maximum panel weight Maximum panel weight is fixed and does not increase with extra monomounts. 		Installers must ensure that: <ul style="list-style-type: none"> Any of the limits detailed above are not exceeded. A Parts are securely fixed using screws or bolts that are strong enough to support the total load. When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used. 	