




NZ·azz


extra·spacers

Used with monomounts and multimounts

WITH MONOMOUNTS

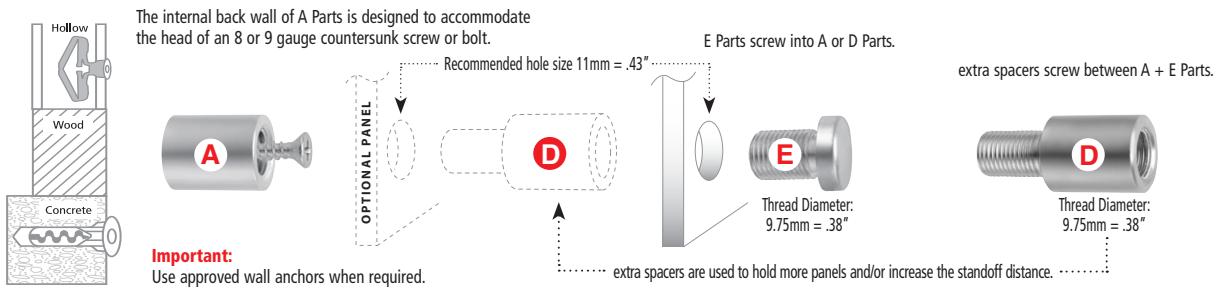

WITH MULTIMOUNTS

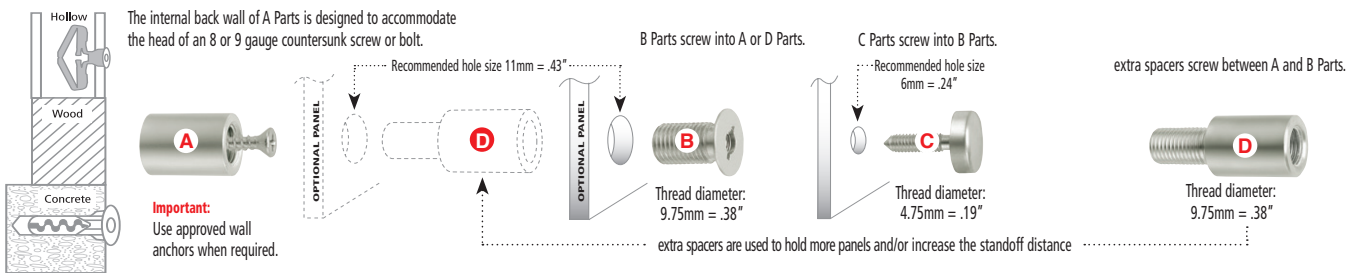

EXTRA SPACERS

	DESIGNER		HYBRID		RESIN	
	Metric	Imperial	Metric	Imperial	Metric	Imperial
SMALL						
Max load per part	18 kgs	39.6 lbs	6 kgs	13.2 lbs	6 kgs	13.2 lbs
Max panel weight	36 kgs	79.2 lbs	12 kgs	26.4 lbs	12 kgs	26.4 lbs
Max panel thickness	4mm	.16"	4mm	.16"	4mm	.16"
MEDIUM						
Max load per part	24 kgs	52.8 lbs	8 kgs	17.6 lbs	8 kgs	17.6 lbs
Max panel weight	48 kgs	105.6 lbs	16 kgs	35.2 lbs	16 kgs	35.2 lbs
Max panel thickness	8mm	.31"	8mm	.31"	8mm	.31"
LARGE						
Max load per part	30 kgs	66 lbs	10 kgs	22 lbs	10 kgs	22 lbs
Max panel weight	60 kgs	132 lbs	20 kgs	44 lbs	20 kgs	44 lbs
Max panel thickness	12mm	.47"	12mm	.47"	12mm	.47"
XL						
Max load per part	36 kgs	79.2 lbs	12 kgs	26.4 lbs		
Max panel weight	72 kgs	158.4 lbs	24 kgs	52.8 lbs		
Max panel thickness	16mm	.63"	16mm	.63"		
XXL						
Max load per part	42 kgs	92.4 lbs				
Max panel weight	84 kgs	184.8 lbs				
Max panel thickness	19mm	.75"				

IMPORTANT

- Maximum load per extra spacer should not exceed the maximum load per part
- Maximum total load should not exceed the maximum panel weight
- Maximum panel weight is fixed and does not increase with extra standoffs

Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.