





NZ·azz

multi·mounts

Best for changeable graphic displays

HYBRID COLLECTION

Standard Sizes and Dimensions

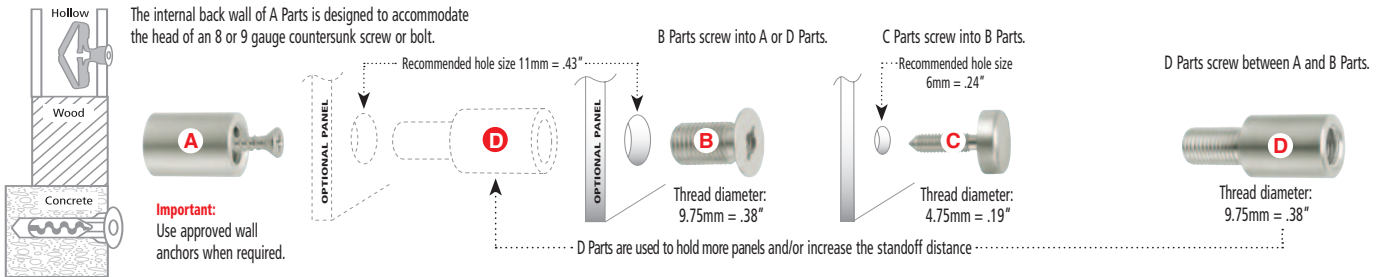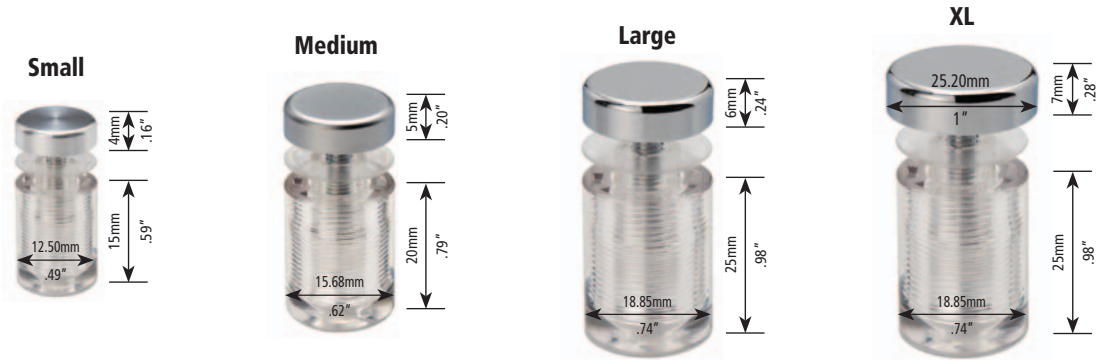

Standard A+B+C Parts	Maximum Part Capacities				Optional Extra D Parts	
	RESIN B PARTS		C PARTS		RESIN D PARTS	
	Metric	Imperial	Metric	Imperial	Metric	Imperial
SMALL						
Max load per part	6 kgs	13.2 lbs	6 kgs	13.2 lbs	6 kgs	13.2 lbs
Max panel weight	12 kgs	26.4 lbs	12 kgs	26.4 lbs	12 kgs	26.4 lbs
Max panel thickness	4mm	.16"	4mm	.16"	4mm	.16"
MEDIUM						
Max load per part	8 kgs	17.6 lbs	8 kgs	17.6 lbs	8 kgs	17.6 lbs
Max panel weight	16 kgs	35.2 lbs	16 kgs	35.2 lbs	16 kgs	35.2 lbs
Max panel thickness	8mm	.31"	8mm	.31"	8mm	.31"
LARGE						
Max load per part	10 kgs	22 lbs	10 kgs	22 lbs	10 kgs	22 lbs
Max panel weight	20 kgs	44 lbs	20 kgs	44 lbs	20 kgs	44 lbs
Max panel thickness	12mm	.47"	12mm	.39"	12mm	.47"
XL						
Max load per part	10 kgs	22 lbs	10 kgs	22 lbs	10 kgs	22 lbs
Max panel weight	20 kgs	44 lbs	20 kgs	44 lbs	20 kgs	44 lbs
Max panel thickness	16mm	.63"	16mm	.47"	16mm	.63"

IMPORTANT

- Maximum load per multimount should not exceed the maximum load per B Part.
- Maximum total load should not exceed the maximum panel weight in the B Parts column.
- Maximum panel weight is fixed and does not increase with extra multimounts.

Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.