

KR AUDIO ELECTRONICS HI VACUUM TUBE

KR PX 25

General data

Filament specifications:	DC/AC Voltage	4 V
	DC/AC Current	1,8 A

Amplification Factor	9,5
----------------------	-----


Power Amplifier class A1

Maximum

DC Plate Voltage	500 V
Dissipation	30 W
DC Plate Current	90 mA

DC Plate Voltage	400 V
DC Plate Current	63 mA
Grid Voltage	-31 V
Plate Resistance	1150 ohm
Transconductance	7,4 mA/V

CONNECTION OF THE VALVE BASE PX25 (UX4 socket)

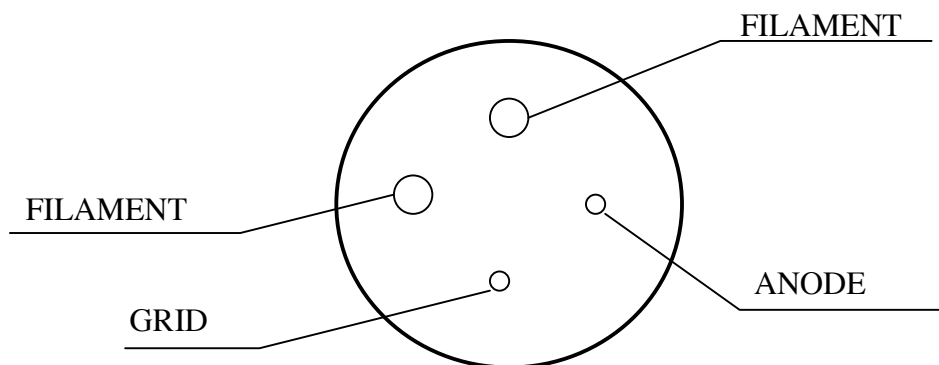

VIEW FROM BELOW

KR AUDIO ELECTRONICS HI VACUUM TUBE

KR PX 25

General data

Filament specifications:	DC/AC Voltage	4 V
	DC/AC Current	1,8 A

Amplification Factor	9,5
----------------------	-----


Power Amplifier class A1

Maximum

DC Plate Voltage	500 V
Dissipation	30 W
DC Plate Current	90 mA

DC Plate Voltage	400 V
DC Plate Current	63 mA
Grid Voltage	-31 V
Plate Resistance	1150 ohm
Transconductance	7,4 mA/V

CONNECTION OF THE VALVE BASE PX25 (UF4 socket)

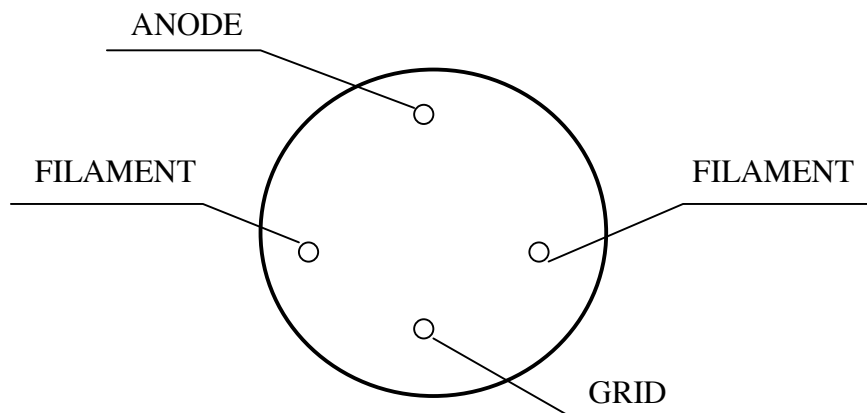

VIEW FROM BELOW

Plate characteristics PX 25

