



AMICO +

Tap Timer

DESCRIPTION

Amico +™ tap timer has been studied to be the most user friendly and a high quality product in the market. Programming has never been so easy, the large display 3" allows to see all the data in one look. The backlit display and the large characters allow to program the controller during the day and the night.

COMPLETE USER-FRIENDLY PROGRAMMING

- 1 program
- Run time min/max: 1/240 minutes
- Watering frequency: from every 6 hours up to once 15 days
- Current time indication
- Start time indication
- Duration of watering indication
- Frequency indication
- Next irrigation indication
- Watering countdown
- Low battery function

TECHNICAL CHARACTERISTICS

- 1 zone
- Inlet thread 3/4"-1"
- Outlet thread 3/4"
- Max working pressure 8 bars
- Max flow 40 l/m
- Diaphragm 9 VDC electric valve
- Removable control unit
- ABS Body
- Hard plastic cover for LDC display protection
- Wide backlit 3" LCD display
- Powered by 2 alkaline 1.5 volt (AA)

1. REMOVABLE CONTROL UNIT



2. EASY READABLE SCREEN POSITION




3. 3" BACKLIT LCD DISPLAY




4. PROGRAMMING BOTTONS




5. START TIME



6. DURATION




7. FREQUENCY



3 PROGRAM WITH 3 SIMPLE STEPS.



Code	Models
200.4094700	AMICO +
000.da create	AMICO + with sensor
200.4094520	ELECTRIC VALVE AMICO +

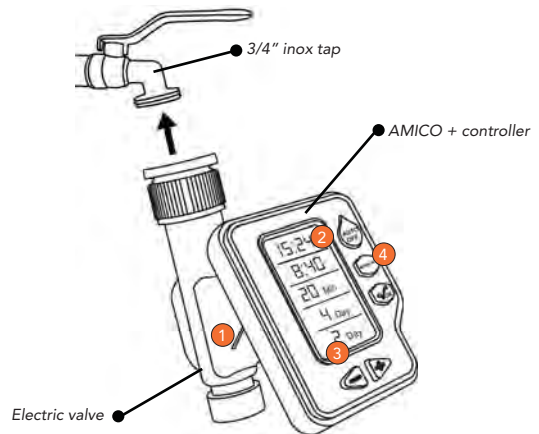



AMICO 2 +

Tap Timer

DESCRIPTION

Amico 2 +™ tap timer has been studied to be the most user friendly and a high quality product in the market. Using the same programming of Amico +, Amico 2 + allows to set 2 different valves completely independent. The backlit display allows to program the controller during the day and the night without problems.

COMPLETE USER-FRIENDLY PROGRAMMING

- 1 program
- Run time min/max: 1/240 minutes
- Watering frequency: from every 6 hours up to once 15 days
- Current time indication
- Start time indication
- Duration of watering indication
- Frequency indication
- Next irrigation indication
- Watering countdown
- Low battery function


TECHNICAL CHARACTERISTICS

- 2 zone
- Inlet thread 3/4"-1"
- Outlet thread 3/4"
- Max working pressure 8 bars
- Max flow 40 l/m
- Diaphragm 9 VDC electric valve
- Removable control unit
- ABS Body
- Hard plastic cover for LDC display protection
- Wide backlit 3" LCD display
- Powered by 2 alkaline 1.5 volt (AA)

1. REMOVABLE CONTROL UNIT




5. START TIME



2. EASY READABLE SCREEN POSITION




6. DURATION



3. 3" BACKLIT LCD DISPLAY



7. FREQUENCY



4. PROGRAMMING BUTTONS



3 PROGRAM WITH 3 SIMPLE STEPS.



Code	Models
000.da creare	AMICO 2 +

