



Tanlite Lighting
 E-mail: sales@tanlite.com
www.tanlite.com
 510-556-0948

ADVANTAGE

- UL cUL certificate.
- Lumileds or Samsung Chip, high CRI.
- Input voltage 120-277VAC.
- Output constant current lever can be adjusted through output cable with 0-10V.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.





APPLICATION



- Warehouse, factory and workshops;
- Highway toll station and gas station;
- Exhibition hall;
- Gymnasium and supermarkets, etc.

DIMENSIONS

Pendent



Surface-mounted





SPECIFICATIONS

OPTICAL	Input Power (Tolerance : $\pm 10\%$)	300W
	Color Temperature	3000K-6500K
	Lumen (Tolerance : -10%)	39600LM-43500LM
	Efficacy (Tolerance : -3%)	132LM/W-145LM/W
	CRI	>80
	Color Consistency	<6 Steps (or <6 SDCM)
	UGR	<28 (X=4H, Y=8H; S/H=1; Reflectances: 70%/50%/20%)
	Diffuser Type	PC Lens
	Beam Angle (50%) (Tolerance : $\pm 15\%$)	90 Degree
ELECTRICAL	Input Voltage and Frequency	120-277VAC, 50/60Hz
	PF (Tolerance : -3%)	≥ 0.9
	THD (Tolerance : $+5\%$)	$\leq 20\%$
	Flicker Percent	<10%
	Driver Brand	China Brand Driver (0-10V dimming)
	Driver Model	LF-FAA320 or FD-300C-260B
	Driver Surge protection	L/N-PE: 6kV, L-N: 6kV
	Dimming	0-10V dimming standard
	Optional Accessory	Motion Sensor, PIR sensor, Surge-protective Device
MATERIALS	LED Brand	Lumileds
	LED Type	SMD2835
	LED QTY	560PCS
	Housing	Die-cast aluminum
	Housing Color	Black, White, or Customized
	Waterproof Rating	WET (IP65)
OTHERS	Operating Temperature	Without Motion Sensor: -40°C TO 50°C
		With Motion Sensor: -30°C TO 50°C
	Storage Temperature	-40°C TO 80°C
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
Warranty	5 years	

PACKAGE

Lamp Type	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
Pendent	450*450*200mm	1 PC	3.8KG	4.9KG
Surface-mounted	450*450*200mm	1 PC	4.5KG	5.6KG

Tolerance of Carton Size: ± 15 MM, Tolerance of Weight: $\pm 10\%$.

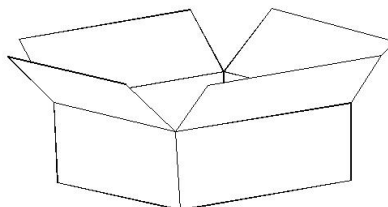


LIGHT DISTRIBUTION TESTING PARAMETERS


Photometric Results

CIE Class: Direct	Total Rated Lamp Lumens: 44936.8 lm
Measurement Flux: 44936.8 lm	Efficiency: 100%
Downward Ratio: 99%	Upward Ratio: 1%
Horizontal Diffuse Angle(10%,50%): H124.4,H88.8	
Vertical Diffuse Angle(10%,50%): V125.2,V88.5	
Luminaire Efficacy Rating (LER): 145.06	Central Intensity: 22074.53 cd
Max. Intensity: 22425.93 cd	Pos of Max. Intensity: H270 V9
S/MH(C0/C180): 1.34	S/MH(C90/C270): 1.35

Luminous Intensity Distribution Curve

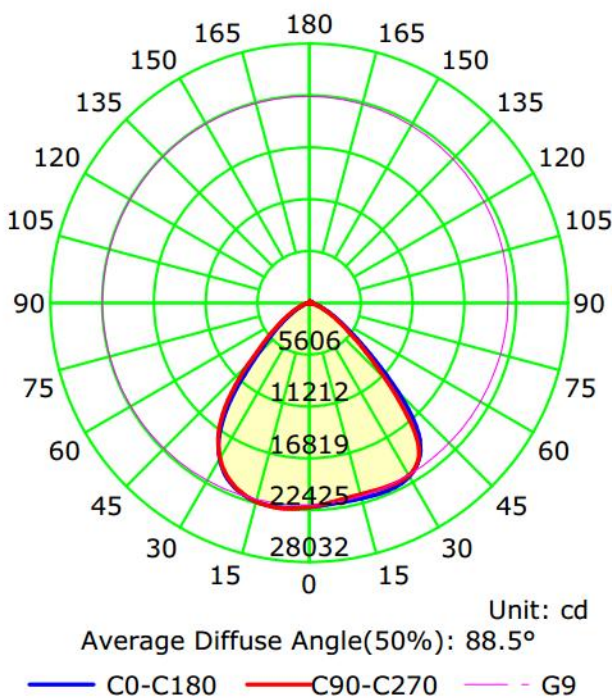

The Average Illuminance Effective Figure

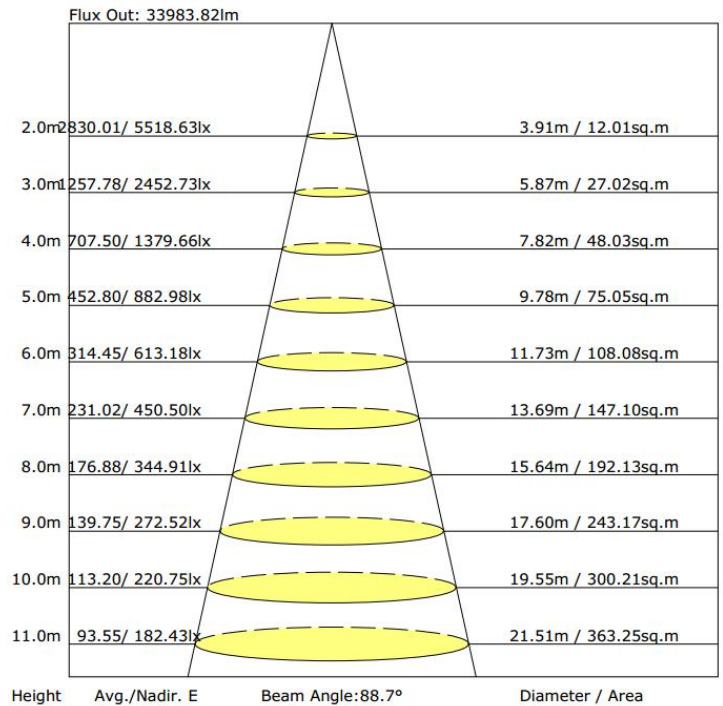

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.