




Super Skeiner Assembly Instructions

Set-Up

- Start by removing the crank and counter from the base and set aside. Next, gently remove the arm plates from the base, and set these aside as well. Remove the spreader bar and set it aside; flip the base over and pop the sides up.
- Insert the spreader bar into the arm plates by sliding the wing feature into the stop-notch that lines up with the arm. Repeat on the other end; your arm plates should be offset from one another (the arms on each end should be opposite the gaps on the other end). If yours are lined up, change the position of the removeable spreader bar endcap so that they oppose each other.
- Once assembled, place the arm assembly into the receiver cups. You may need to either pull or push the base apart, depending on the tightness. Place the counter on one side, and the crank on the other (these can be used on either side, depending on your preference).



To Use

- To start skeining, either slide your yarn into the notch on one of the black caps or tie it through a hole in the arm. Wrap your yarn around the next arm and begin turning the arm assembly. Continue turning and wrapping the yarn back and forth.
- When you are finished with your skein, remove the crank and counter, and then remove the arm assembly from the base. Turn one black endcap down, allowing the skein to begin coming off, and it will release from the arms.



Expanding

- To use the extender bar (for 2.5 or 3 yard skeins), remove everything from the base, and pull the arm plates off of the spreader bar. Pull the removable cap off of one end (it's slightly different) and set it aside. Remove the extender bar from the base and insert the original spreader bar into the end of it. Place the cap back on the extender and the bar is ready to go.
- To lengthen the base, pull the base outward and reassemble the arm plates onto the extended spreader bar. Place the arm assembly into the receiver cups, then reattach the crank and counter. Skeining is the same as previously described.




Packing Up

- To disassemble the Super Skeiner, remove the crank and counter and set them aside. Remove the arm assembly and set it aside as well. Fold down the middle of the base structure and flip it over. Pull the arm plates off of the spreader bar, and set the spreader bar back into its storage notches. Line up the pegs on the base with the small holes in the arm plates. Place the crank and counter back in their storage brackets.





To view the instruction videos playlist, please visit <https://buff.ly/31bGQeM> or scan the QR code.

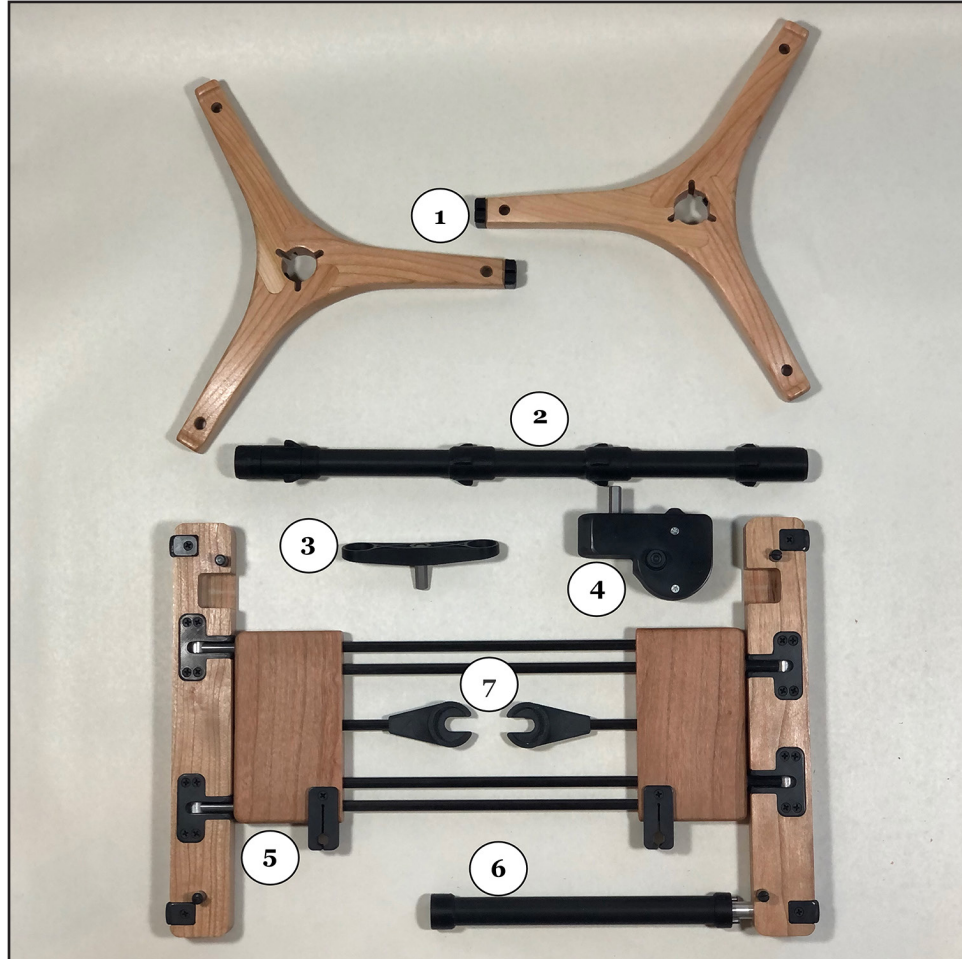

1. Arm plates (2)

2. Spreader bar (for 1, 1.5, & 2 yd skeins)

3. Crank/handle

4. Counter

5. Super Skeiner base

6. Spreader bar extender (for 2.5 & 3 yd skeins)

7. Receiver cups