



Luggage Cart Bumper Guard



Item: LCBG

Custom fit for Luggage & Bell Carts

Eliminate Damage • Reduce Repair Costs • Increase Staff Efficiency

- Eliminate damage to facility caused by luggage carts
- Reduce operating costs for repairs & cosmetic touch-ups
- Hotel staff & guests can quickly maneuver heavy carts without damaging walls, doorframes and elevators

Enclosed:

- 1 - Luggage Cart Bumper Guard
- 14 - Screws
- 2 - Velcro® strips

Additional supplies needed:

- Powered screwdriver with a Phillips head

IMPORTANT Center "DuraBumper" logo on narrow-end of cart as shown, in Fig. 7.

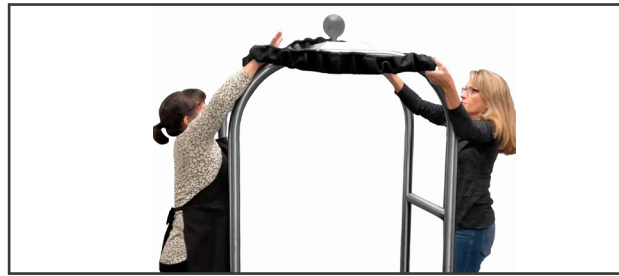


Fig. 1

Fig. 1 Two people are recommended for easy installation. Slip fabric bumper over cart.

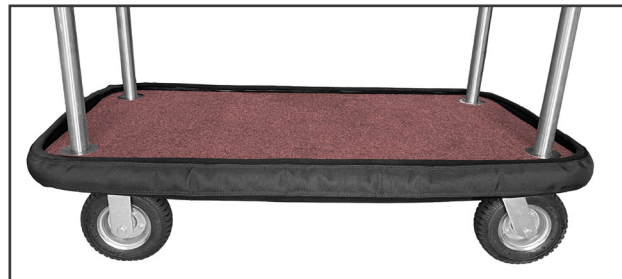


Fig. 2

Fig. 2 Pull bumper guard down and stretch over cart's rubber bumper.

Refer to Fig. 3 through Fig. 6 for each long-side of cart.



Fig. 3

Fig. 3 Pull bumper downward and center Velcro strip on rubber bumper.

IMPORTANT Velcro strips must be positioned along TOP-EDGE of rubber bumper.



Fig. 4

Fig. 4 Install FIRST screw at center and TOP-EDGE of Velcro.

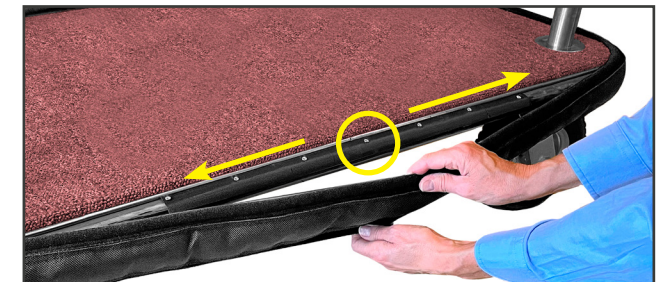


Fig. 5

Fig. 5 Working outward from center of Velcro, install the remaining hardware by evenly spacing each screw.



Fig. 6

Fig. 6 Pull fabric bumper guard up and over rubber bumper and firmly press onto Velcro.

Fig. 7 Installation complete!

