

3 STEP TRAMPOLINE LADDER



USER MANUAL

ASSEMBLY, INSTALLATION,
AND USER INSTRUCTIONS



WARNING

1. Do not use trampoline ladder if children are under 6 years of age.
2. Remove trampoline ladder when trampoline is not in use
3. Max user weight: 330Lbs.

For customer service, please contact:
888-891-4689
Monday through Friday
8:00 am to 5:00 pm PST
or visit www.SkyBoundUSA.com
help@skyboundusa.com

ASSEMBLY PARTS

KEEP THIS MANUAL FOR FUTURE REFERENCE



A LADDER STEPX3



B LADDER HANDLE BARX2



C LADDER BASEX2 UPPER - C



D LADDER BASEX2 LOWER - D



E
M6NUT
2PCS




F
M6X40
6PCS



G
M6X30
4PCS



H
M6NUT
6PCS



I
M6NUT
4PCS



J
ELASTIC ROPE
2PCS



K
ALLEN KEY
1PC



FX1



GX1



IX1

EXTRA PARTS


3-STEP LADDER ASSEMBLY

DIAGRAM 1

Reference Diagram 1 to proceed with the installation:


1. Install the Ladder Step Part (A) to the corresponding position of the Handlebar Part (B) and connect with bolt Part (F) and hexagon nut Part (H) and tighten with Allen Key Part (K).
2. Insert the Handlebar Part (B) into the Upper Ladder Base Part (C) on both sides and connect with Bolt Part (G) and Cap Nut Part (I) (aligned with the hole position) and tighten with Allen Key (K).
3. Install the Ladder Step Part (A) to the corresponding position of the Upper Base Part (C) and connect with bolt Part (F) and hexagon nut Part (H) and tighten with Allen Key Part (K).
4. Insert the Upper Ladder Base Part (C) into the Lower Ladder Base Part (D) on both sides and connect with Bolt Part (G) and Cap Nut Part (I) (aligned with the hole position) and tighten with Allen Key (K).
5. Install the Ladder Step Part (A) to the corresponding position of the Lower Base Part (D) and connect with bolt Part (F) and hexagon nut Part (H) and tighten with Allen Key Part (K).
6. Install both Nuts Part (E) into the Lower Ladder Base Part (D) and tighten.

DIAGRAM 2

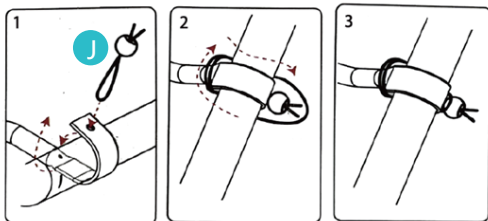

Reference Diagram 2 to proceed with the installation:

1. Insert Elastic Rope Part (J) through the opening of the top Part (B) (On the Hook of the ladder handlebar).
2. Loop the elastic rope around the frame of the trampoline.
3. End of the elastic rope must be wrapped around the ball.

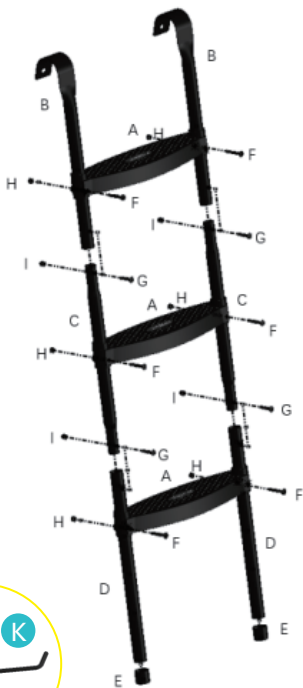

Make sure that the SkyBound logo is facing front while the handle bars are facing back