

Attenuator (Fixed)

Fixed Attenuator – 10dB 100mW

PN: ATT10G1D0P1W


Features:

- High-precision Thin-film Chip attenuator (10dB)
- Operating Freq. Range: DC to 10 GHz
- Input Power: 100 mW CW
- Attenuation Tolerance: $\pm 0.3\text{dB}$
- VSWR < 1.3
- Operating Temp. Range: $-55\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$
- SMA Female Connector (50 ohm system)


Applications:

- Cell
- Microwave Radio
- Test Instrumentation
- Software Defined Radio/Ham Radio

Case PN: 6UCD2W6S1P2

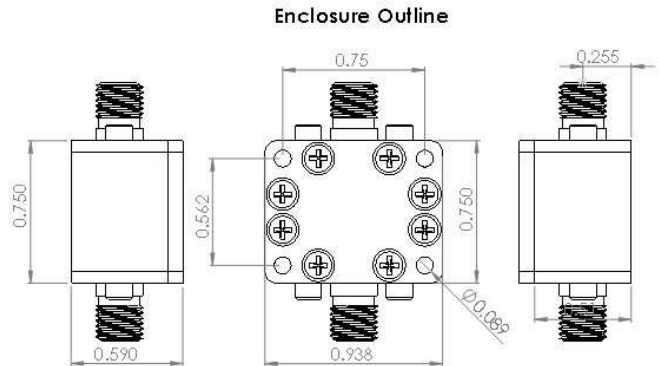

S-Parameters

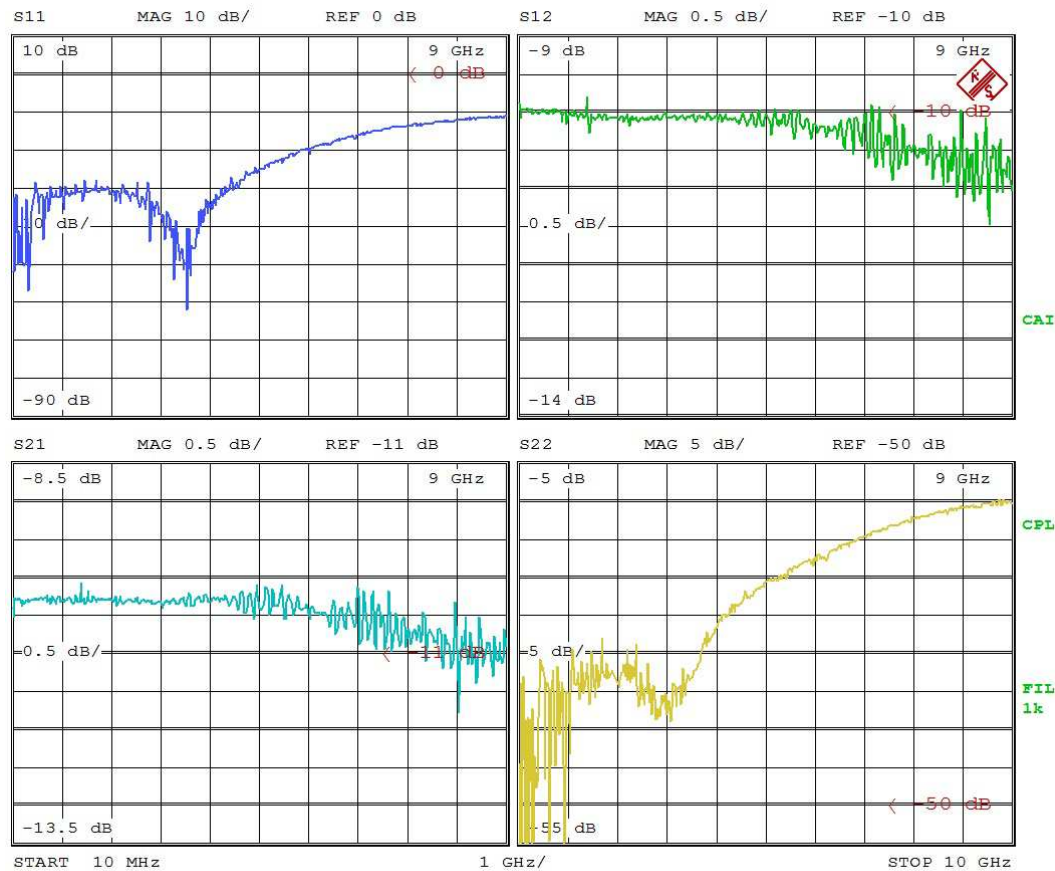

Date: 8.APR.17 12:08:20



Lotus Communication Systems, Inc.

www.lotussys.com 588 Boston Post Rd., Weston, MA 02493 (888) 236-8588 sales@lotussys.com

Rev.A ATT10G1D0P1W