

## Attenuator (Fixed) Fixed Attenuator

# ATT10G3D0P1W

### Features:

Case PN: 6UCD6W6S1P2


- High-precision Thin-film Chip attenuator (3dB)
- Operating Freq. Range: DC to 10 GHz
- Input Power: 100 mW CW
- Attenuation Tolerance:  $\pm 0.3\text{dB}$
- VSWR < 1.3
- Operating Temp. Range:  $-55\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$
- SMA Female Connector (50 ohm system)



### Applications:

- Cell
- Microwave Radio
- Test Instrumentation
- Software Defined Radio/Ham Radio

### Outline drawing (inch)

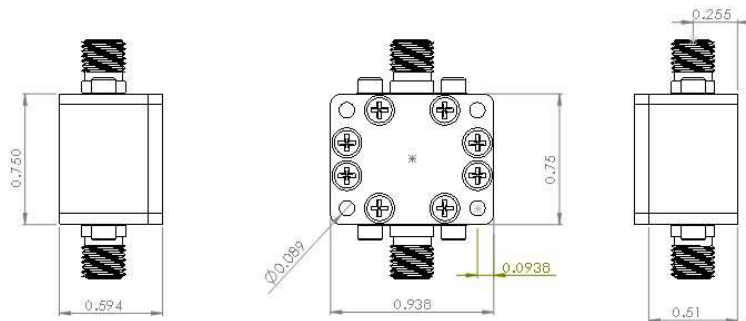

**Lotus Communication Systems, Inc.**

[www.lotussys.com](http://www.lotussys.com) 588 Boston Post Rd., Weston, MA 02493 (888) 236-8588 sales@lotussys.com

Rev.A ATT10G3D0P1W

**Attenuator (Fixed)**  
**Fixed Attenuator**

**ATT10G3D0P1W**

**S-Parameters**

