

24V to 12V 100A 1200W DC-DC CONVERTER, NON-ISOLATED

FEATURES

- ✓ Wide input voltage from 18V to 40V
- ✓ Stable output voltage is 12V
- ✓ 100% full rated power
- ✓ 100% full stable output Current
- ✓ High efficiency up to 95%
- ✓ IP68 waterproof, Epoxy potting, Anti-vibration, Dustproof
- ✓ Cooling by free air convection
- ✓ Surface mountable
- ✓ 1 year warranty
- ✓ Over current protection, Over voltage protection
- ✓ Over temperature shutdown, Output short circuit protection
- ✓ According to: EN 61000-6-3:2007/A1:2011/AC:2012 EN 55014-1:2006/A2:2011 EN 60950-1:2006/AC:2011

model	input voltage range (Vdc)	output voltage (Vdc)	output current typ (A)	output power max (W)	ripple and noise typ (mVp-p)	efficiency typ (%)
B100-24-12	18-40	12	100	1200	120	95

Note: All specifications measured at 25°C, nominal input voltage, and full load unless otherwise noted.

INPUT

Parameter	Test conditions or description	Min	Typ	Max	Units
operating input voltage	24 V input	18	24	40	Vdc

OUTPUT

Parameter	Test conditions or description	Min	Typ	Max	Units
line regulation	measured from high line to low line			±0.2	%
load regulation	measured from full load to zero load			±0.2	%
voltage accuracy				±1.5	%
adjust range		11.9	12	12.1	V
temperature coefficient			±0.03		%/°C

PROTECTIONS

Parameter	Test conditions or description	Min	Typ	Max	Units
output over voltage protection	%Vo	115		140	%
current limit	% nominal output current	110	120	130	%
thermal shutdown case temp.			80		°C
cooling	free air convection				
fuse	built in PCB		200		A


SAFETY AND COMPLIANCE

Parameter	Test conditions or description	Min	Typ	Max	Units
safety approvals	EN 61000-6-3:2007/A1:2011/AC:2012 EN 55014-1:2006/A2:2011 EN 60950-1:2006/AC:2011				
enclosures	IP68				

ENVIRONMENTAL

Parameter	Test conditions or description	Min	Typ	Max	Units
case operating temperature		-40	25	85	°C
Ambient temperature		-20		60	°C
storage temperature		-40		105	°C
humidity	non-condensing			95	%

DERATING CURVE

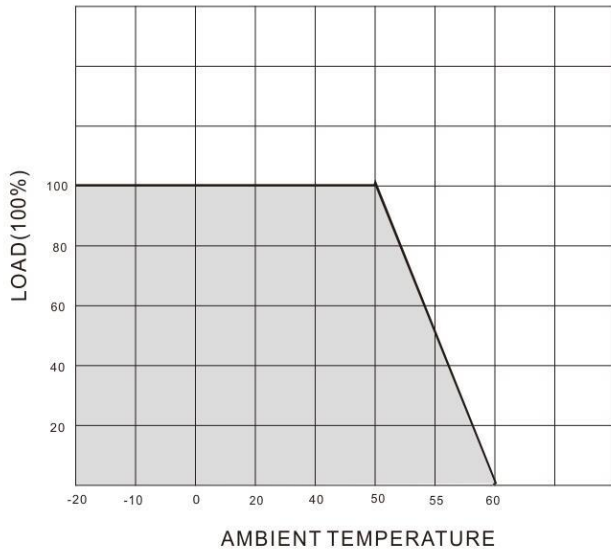

MECHANICAL

Parameter	Test conditions or description	Min	Typ	Max	Units
dimensions	220 x 127 x 63				mm
case material	aluminum				
weight			2200		grams
Package	1pcs/box, 9pcs/carton				
Carton measurement	47*30.7*32.8cm				cm

PHOTOS



INPUT+ TO BATTERY+

GND TO BATTERY-


OUTPUT+ TO LOAD+

GND TO LOAD-


Notes: **Never reverse the input polarity, or it burns the converter.**

MECHANICAL DRAWING

Units: mm

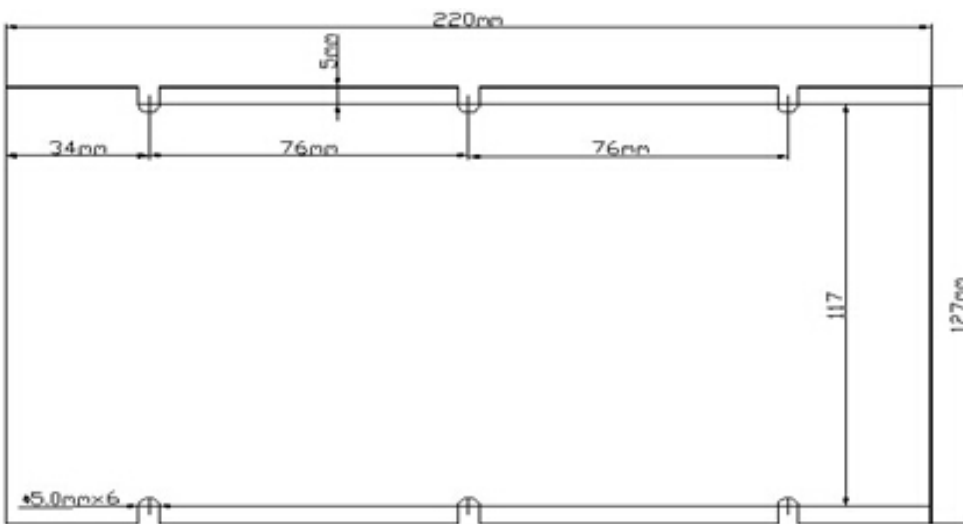

WIRING DIAGRAM

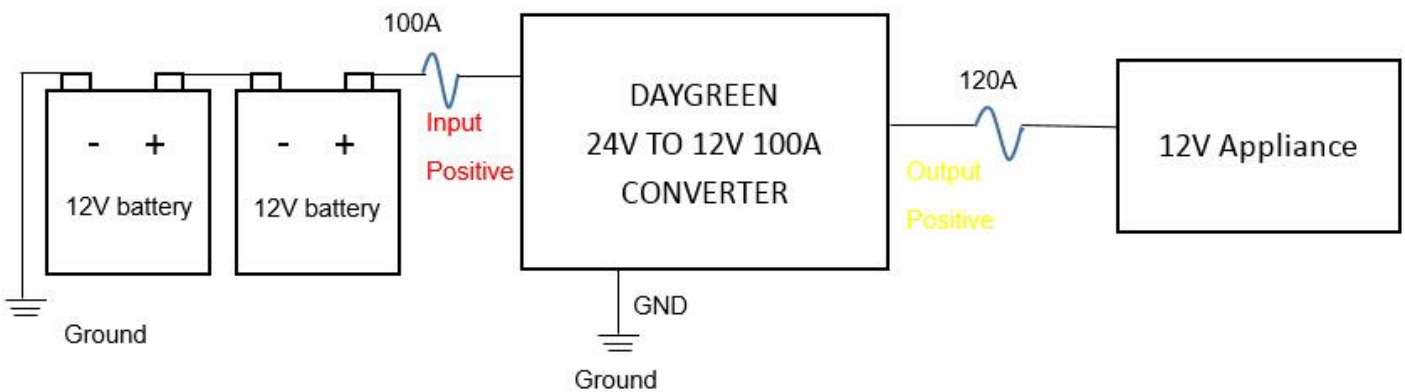

REVISION HISTORY

rev.	description	date
1.0	initial release	5/4/2014
2.0	revision	November 21, 2017

Issued by Shenzhen Daygreen Technology Co. LTD

4/F, Bldg.3, Jin Yuda Ind. Zone Shajing, Baoan

Shenzhen GD 518125

China

Tel: 86 755 2331 3263

sales@daygreen.com

www.daygreen.com

Power conversion solutions from 1W to 200kW