

The Webley Owner's Manual RAIDER 10



WEBLEY

Please read this manual before using your airgun

Warranty

Each Webley air rifle is fully guaranteed against faulty workmanship and defective materials for a period of 12 months from the original date of purchase provided it has not been misused or tampered with in any way.

Warranty must be registered to be valid.

Register your warranty and view conditions at:

www.webley.co.uk

Warranty applies to UK residents only. If not a UK resident and the gun was purchased outside the UK please refer to the retailer / distributor. Should you experience problems with your rifle please consult the dealer from whom it was purchased. This guarantee does not affect your statutory rights.

THE LAW

**KNOW THE LAW ON AIRGUNS AND OBEY IT.
ACT RESPONSIBLY, ACT SAFELY AND
ENJOY YOUR SHOOTING!**

! WARNING !

EACH WEBLEY RAIDER CONTAINS PRESSURISED AIR AND SHOULD ONLY BE DISMANTLED BY A COMPETENT GUNSMITH. DO NOT ATTEMPT TO DISMANTLE THE GUN IF THE RIFLE IS PARTIALLY OR FULLY CHARGED. SERIOUS INJURY AND/OR DAMAGE MAY RESULT IF THIS INSTRUCTION IS IGNORED. TAMPER PROTECTION IS FITTED TO THIS RIFLE TO MAKE ANY MODIFICATIONS TO FACTORY SETTINGS EVIDENT.

OUR POLICY IS ONE OF CONTINUAL IMPROVEMENT. WE RESERVE THE RIGHT TO MODIFY THE SPECIFICATION OF THIS PRODUCT WITHOUT PRIOR NOTICE.

USE, CARE AND MAINTENANCE OF THE WEBLEY RAIDER AIR RIFLE. SPECIFICATION.

The Webley Raider is a ten shot, pre-charged air rifle. Webley Raider ten are available in .177 (4.5mm), .20 Webley (5.0mm) and .22 (5.5mm) calibers. Webley Raiders are designed for use with waisted lead pellets.

The rifle incorporates many special design features which includes:

1. A bolt action cocking and loading system.
2. 10 shot capacity automatic indexing rotary magazine, easily removable for loading. The magazine may also be reloaded when fitted in the rifle.
3. An adjustable 2 stage trigger mechanism.
4. Manual resettable safety catch.
5. A built - in gauge to monitor the cylinder pressure.(10 shot only)
6. A precision rifled barrel to ensure pinpoint accuracy.
7. A dovetail, which is incorporated in the barrel housing to fit an optional telescope sight.
8. An ambidextrous, custom style stock incorporating double cheekpieces, chequered pistol grip and single ventilated rubber recoil pad. The stock is available in beech and walnut. The walnut stock also incorporates highly defined cheekpieces.
9. A quick-fill system is fitted as standard.

SPECIFICATIONS

RAIDER TEN SHOT without moderator

WEIGHT:	3.86 kgs	(8.5 lbs)
BARREL LENGTH - RIFLED:	42.0 cm	(16.5")
OVERALL LENGTH:	91.5 cm	(36")

RAIDER TEN SHOT with moderator

WEIGHT:	4.0 kgs	(8.8 lbs)
BARREL LENGTH - RIFLED:	42.0 cm	(16.5")
OVERALL LENGTH:	108 cm	(42.5")

The Webley Raider is designed specifically for use with dry compressed air.

NO OTHER GAS OR GAS COMBINATION MUST BE USED

The rifle may be filled from a divers bottle, a suitable compressor or by using The Webley Tri - Pump & Accupumps - hand pump specifically made to fill precharged airguns.

MAXIMUM SAFE WORKING PRESSURE (SWP) : 200 BAR.

RECOMMENDED FILL PRESSURE : 190 BAR.

GENERAL INSTRUCTIONS.

BEFORE USING YOUR NEW RIFLE:

1. Check it is fully charged.
2. Fit your optional `scope and mounts.
3. Appreciate the basic safety rules.

THE BASIC SAFETY RULES ARE:

1. Treat every rifle as if it is loaded.
2. Never point the rifle at anyone, or allow anyone to point a rifle at you, even if you know it is not loaded.
3. Always carry the rifle so that the direction of the muzzle is under control, even if you stumble.
4. Always be sure of your target and what lies behind it before firing your rifle.
5. Never leave a loaded rifle unattended.
6. Beware of targets that tend to cause ricochets.

OPERATING INSTRUCTIONS.

CHARGING THE RIFLE.

Fit the filler nozzle to the air-line of the charging equipment, which must incorporate a pressure gauge. Remove the filler hole plug from the front of the rifle. Ensure both filler nozzle and rifle filler hole are clear from dirt and push the nozzle into the filler hole. Fill the rifle to the cylinder pressure quoted previously in this manual. Do not exceed the maximum fill pressure as this will reduce the velocity of the rifle and may damage rifle components. When using a divers bottle, refill the rifle slowly to prevent the heat created by the filling operation damaging the rifles components. **Undo the hose air drain screw before pulling the filler nozzle out of the rifle.** Refit the filler hole plug to the rifle.

LOADING THE RIFLE AND USING THE TEN SHOT MAGAZINE.

The magazine incorporates a raised boss on its rear face and can only be fitted one way to the rifle. It rotates clockwise when viewed from the rear of the rifle. The groove on the side of the barrel housing allows you to observe whether the next magazine chamber about to rotate into alignment with the barrel is loaded with a pellet or empty.

To remove the magazine, open the bolt and push it into the rear cylinder tube slot (safe position). **THIS OPERATION COCKS THE TRIGGER MECHANISM / HAMMER ASSEMBLY. IF THE BOLT IS NOT IN THE SAFE POSITION AND THE TRIGGER IS PULLED, THE RIFLE WILL DISCHARGE EVEN THOUGH THERE IS NO PELLET IN THE BARREL.**

DO NOT CLOSE THE BOLT UNTIL YOU ARE READY TO USE THE RIFLE. ENSURE THE BOLT IS FULLY CLOSED BEFORE FIRING THE RIFLE AS ITS PERFORMANCE WILL BE AFFECTED IF NOT FULLY CLOSED.

To reload the rifle, pull the bolt fully open before pushing it forwards - this ensures the sear engages with the hammer assembly and the magazine has indexed to the next pellet chamber. Once the bolt is closed the rifle is ready to fire.

As the pellets are used and the magazine rotates, its empty chambers become visible above the barrel housing. These chambers may be refilled as they are revealed without removing the magazine if desired.

NOTE

Do not cycle the bolt until the pellet in the barrel chamber has been fired. Reloading the rifle continually without firing will push another pellet/pellets into the barrel bore. This action will block the barrel and it will be necessary to dismantle the barrel from the rifle to remove the blockage.

If the magazine is unintentionally indexed, adopt either of the following procedures to prevent another pellet from entering the barrel chamber:

- a) with the bolt fully open, rotate the magazine clockwise by hand until the empty chamber is back in line with the barrel, then close the bolt.
- b) remove the magazine from the rifle, close the bolt, point the rifle at a target, then fire the rifle. Refill the magazine and refit to the rifle.

SAFETY

In the interest of safety, never store or leave the rifle unattended with pellets left in the magazine or barrel chamber. To make a loaded rifle safe, open the bolt and remove the magazine. If a pellet has been loaded into the barrel, close the bolt, point the gun at a safe target and fire the rifle.

If desired, refit the empty magazine to the rifle, hold the bolt handle in the most rearward position against the hammer spring pressure, then pull the trigger. Allow the hammer spring pressure to slowly close the bolt assembly. Alternatively, close the bolt, point the rifle towards a safe target and fire the rifle.

It is recommended to store the magazines separately from the rifle to prevent unwarranted use.

Safety Catch

The Webley Raider is fitted with a manual resettable safety catch at the rear of the main cylinder.

Rotate the safety catch clockwise into the SAFE position. It is recommended that the safety catch should be kept in this position until you are ready to fire a shot.

Rotate the safety catch anti-clockwise in the FIRE position, a red dot is now clearly visible. The gun will now fire when the trigger is operated.

NOTE

1. ALWAYS ENSURE THE MAGAZINE AND THE BARREL ARE NOT LOADED WITH A PELLET BEFORE PROCEEDING WITH ANY ADJUSTMENTS TO THE TRIGGER MECHANISM.

2. IF THE SEAR ENGAGEMENT SCREW IS ADJUSTED, ENSURE A SUFFICIENT AMOUNT OF SEAR ENGAGEMENT WITH THE HAMMER IS

MAINTAINED TO ENSURE THE TRIGGER PULL HAS NOT BEEN SET DANGEROUSLY SENSITIVE. TEST FIRE THE RIFLE PRIOR TO RELOADING THE MAGAZINE.

ADJUSTING THE POWER UK ONLY

The mechanism of this rifle has been factory set to ensure its power falls within the current U.K. 12 ft.lbs. maximum kinetic energy limit allowed without possessing a firearms certificate. The factory setting is tamper protected – any modifications made to the factory setting will be evident and will invalidate your guarantee.

GENERAL MAINTENANCE.

WARNING!

NEVER ATTEMPT TO STRIP THIS RIFLE WHILST IT IS PARTIALLY OR FULLY CHARGED. SERIOUS INJURY AND/OR DAMAGE MAY RESULT IF THIS INSTRUCTION IS IGNORED.

IF THE RIFLE DEVELOPS A FAULT.

Should the rifle develop a fault within the guarantee period, consult the dealer from whom it was purchased. The guarantee does not cover parts inadvertently damaged, or rifles incorrectly assembled by the owner.

This rifle should only be dismantled by Webley personnel or by a competent gunsmith. All components that may affect the performance of the rifle are tamper evident to prevent unwarranted modifications.

TRIGGER MECHANISM ADJUSTMENT.

The Webley Raider 10 is fitted with a 2-stage trigger mechanism and is factory set. The mechanism is adjustable if you wish to alter the factory settings.


To adjust the trigger mechanism, the action must first be removed from the stock. The diagram below shows the location of the trigger adjusting screws.

A - 1st STAGE TRIGGER ADJUSTMENT SCREW

**B - SEAR ENGAGEMENT SCREW.
(2nd STAGE TRIGGER ADJUSTMENT).**

C - SEAR ENGAGEMENT SCREW LOCKNUT.

D - TRIGGER BLADE SCREW.

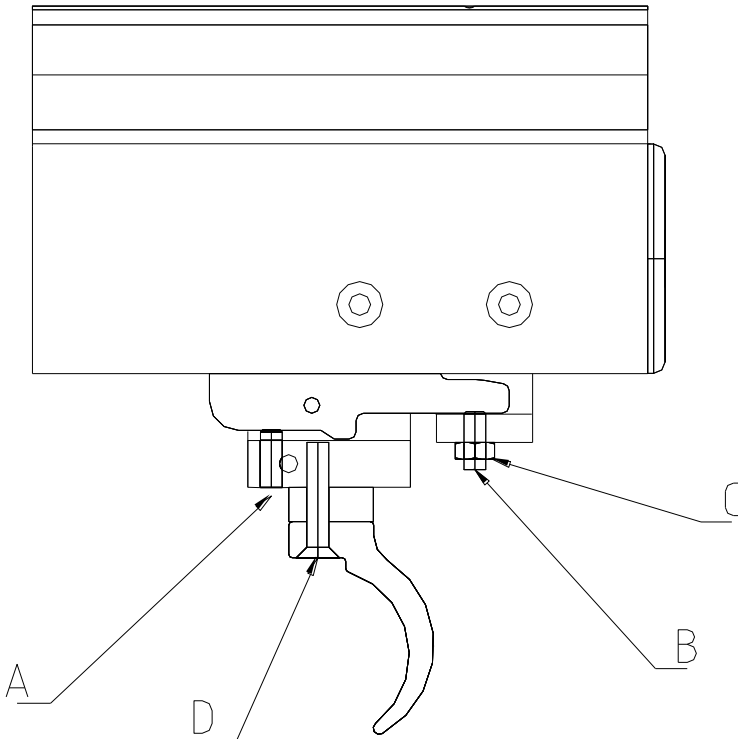

LUBRICATION.

DO NOT APPLY LUBRICATION TO THE AIR FILLER NOZZLE OR THE RIFLES' AIR FILLER HOLE.

DO NOT LUBRICATE THE RIFLE EXCESSIVELY

Use only mineral based oils such as "Weboil" to lubricate the Raider. Occasionally apply oil sparingly to the following parts:-

1. The trigger mechanism - remove the stock for access.
2. With the stock removed, apply oil to the rear of the hammer and hammer spring assembly through the trigger mechanism slot in the body tube.
3. Close the bolt and apply oil through the cylinder bolt slot onto the bolt carrier. Cycle the bolt several times to spread the oil.
4. With the bolt open apply oil to the front of the hammer assembly.
5. Remove the magazine and apply oil to the front of the pellet probe where it contacts the prod seal which is housed in the barrel sleeve, just visible through the magazine slot . Cycle the bolt several times – this operation will lubricate the pellet prod and its 'O' ring.
6. Open the magazine axis pin and apply oil onto its stem.
7. Lightly lubricate the magazine axis hole and its 'O' ring.

LUBRICATING THE MAGAZINE INDEX MECHANISM

Use grease to lubricate the index mechanism components.

To lubricate the magazine indexing mechanism and Magazine stop, undo the 3 - sideplate fixing screws and withdraw the sideplate assembly from the barrel housing. Inspect the condition of all visible parts for wear, particularly the Boss Sleeve and replace if necessary.

QUICK FILL PROBE 'O' RINGS REPLACEMENT.

After a period of time it will be necessary to replace the 'O' rings on the Quick-fill probe. This will be apparent if compressed air is heard to leak from the probe, or the probe is ejected from the rifle during the filling process. Always replace both 'O' rings.

MAGAZINE 'O' RINGS REPLACEMENT (Where fitted).

The 'O' ring, which retains the pellets in the magazine, will need to be replaced after many hundreds of rounds have been fired. Its replacement becomes apparent when the rifle's bolt becomes stiff to operate. Repositioning the 'O' ring in its groove may also overcome the stiffness. Lightly oil the replacement 'O' ring before fitting.

CLEANING THE SILENCER BAFFLES (Where fitted).

The silencer baffles may be removed from the barrel shroud for cleaning. To remove the silencer baffles, unscrew the silencer end cap from the barrel shroud. There are 3 baffles housed in the shroud, together with the baffle spacer and silencer 'O'- ring.

NOTES.

NOTES.

Serial No. _____

Date Purchased: _____

Purchased From: _____



WEBLEY

www.webley.co.uk

www.webleyandscott.com

