



## LOOKING AFTER YOUR WEBLEY ALECTO MAINTENANCE

Each and every Webley Alecto Air -Pistol is built to provide a lifetime of high performance service and requires very little in the way of user maintenance other than all Metal components must be wiped over regularly with lint free cloth impregnated with synthetic oil such as logun SL7 to help resist corrosion.  
(Do not lubricate plastic components).

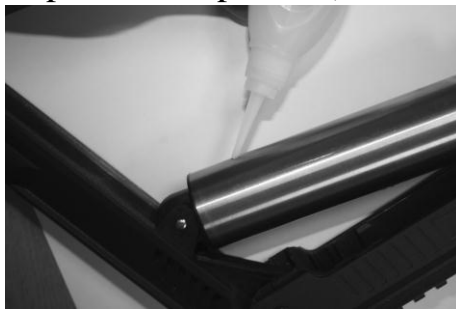


Fig.16

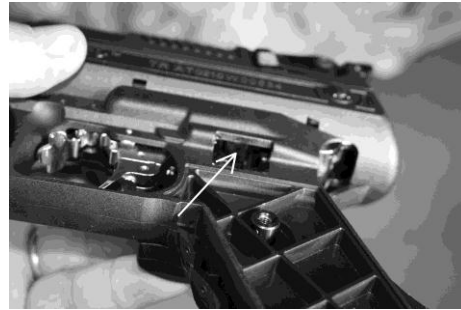


Fig.17

After every 1000 shots or every 6 months even if the air-pistol is not in use, add the supplied mineral solvent based oil (less than 0.5 ml.), using the hole as shown in Fig. 16. After lubrication, if you intend to store the air-pistol after oiling, cock and fire the pistol without loading any pellets for at least twenty shots and then store in its original packaging.

Occasionally or if there is a problem with the firing cycle apply a small amount of light grease to the sear contact face shown in Fig.17.

Before attempting any maintenance on your pistol ensure that there are no pellets in the barrel, if necessary they can be removed with the cleaning rod.

It is vital that the air-pistol is never dismantled or modifications made other than by Webley or Logun trained technicians. Such actions will be highlighted to our technicians through the examination of anti tampering devices built into the pistol. If any such evidence manifests itself, the rifle's warranty will be invalidated.