



AMERICAN DESIGN SOLID METAL BUILT TO LAST

SHOWER HEAD FILTER REPLACEMENT CARTRIDGE


WHY DO WE NEED FILTERED SHOWER WATER?

REMOVES CONTAMINANTS LIKE...
CHLORINE & HEAVY METALS
IMPROVE HEALTH OF...
SKIN, HAIR & NAILS


PROPRIETARY FILTRATION FORMULA

KDF 55 - Copper-zinc alloy, excels at removing chlorine and heavy metals through redox reactions, ensuring your water is free from harmful substances.


CALCIUM SULFITE - Actively captures and neutralizes impurities, particularly chlorine.

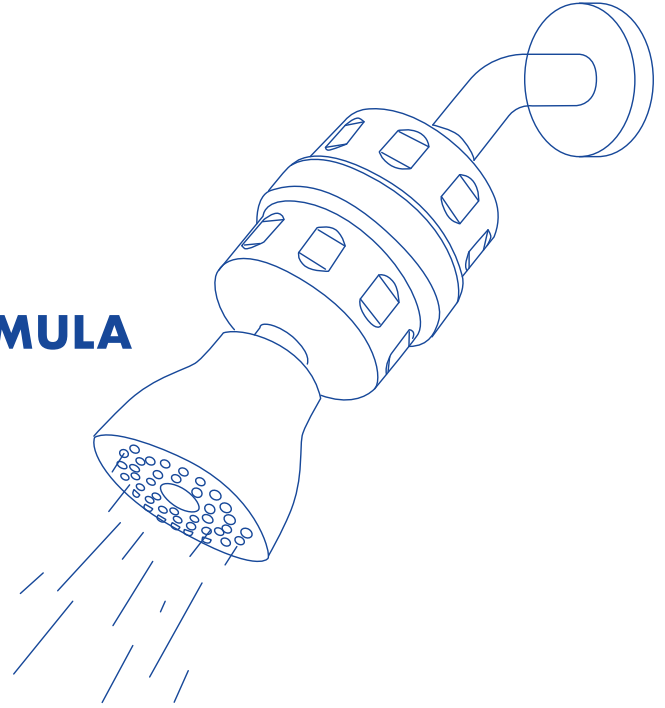

INSTALLATION INSTRUCTIONS

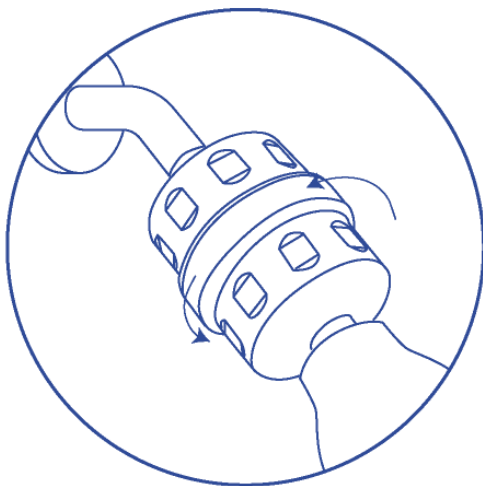


1. Open Filter Housing: Holding the housing attached to the shower arm, unscrew the other half counter clockwise. (Shower head can stay attached when replacing cartridge.)

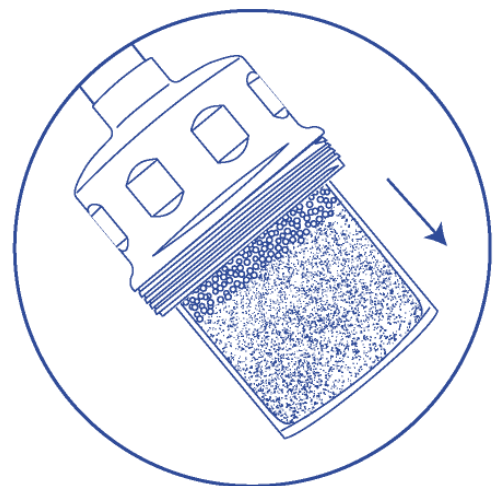


2. Replace Cartridge: If hard to unscrew filter housing, use rubber jar opener or nitrile gloves for grip. Remove the old cartridge. If o-rings are damaged or filter leaking, replace with included o-rings. Insert the new cartridge.


INSTALLATION INSTRUCTIONS

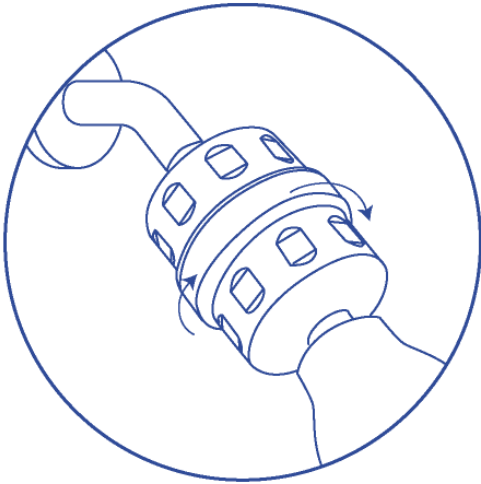

3. Reassemble Filter: Holding the housing attached to the shower arm, screw the other half back on with the new cartridge installed.

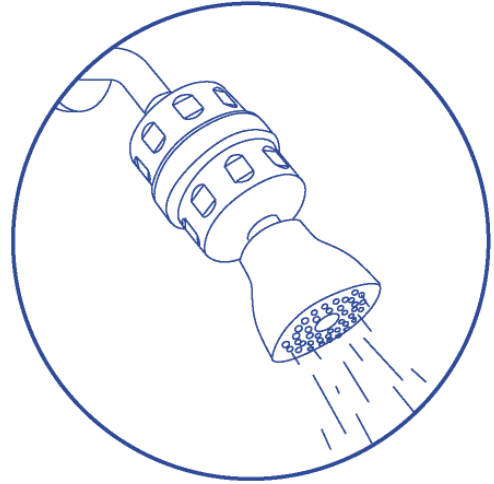

4. Flush Filter: Before use, run warm water through the filter for at least one minute or until the water runs clear.

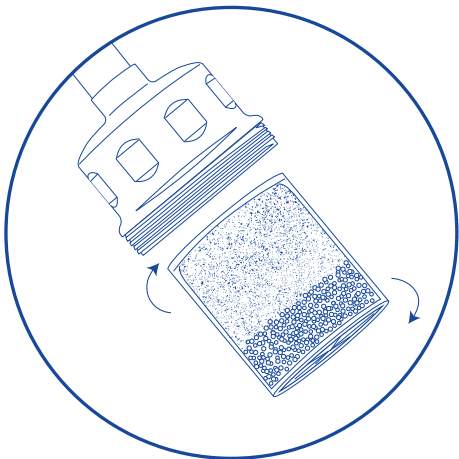

PRO TIP?

Rotate the cartridge at 3 months to extend the life of the cartridge, also known as "back-flushing."

Recommended to replace filter cartridge every 6 months.

SIGN UP FOR REMINDERS AT:

WWW.THESHOWERHEADSTORE.COM/PAGES/FILTER-REMINDER

