

Installation Instruction for Shadow SH SC1 Twind Cello Transducer

Inhalt:

2 transducer discs (20mm diameter)
output socket (6,3mm) with double sided adhesive
copper foil

1. Test fit sensors into the slot between the wing and foot. Pickup should fit tightly for best output (see Fig. 1).

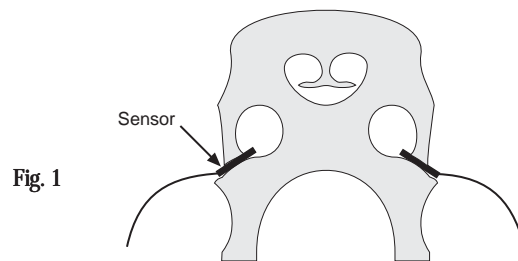


Fig. 1

If pickup is too loose, shim with included shim material (see Fig. 2). If pickup is too tight, file the bridge slot slightly.

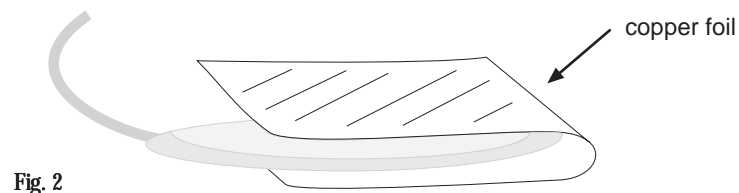


Fig. 2

2. Install the sensors into the bridge slot.
3. Locate the output socket in a convenient location on the instrument and attach with applied double sided adhesive.

Note:

Piezo pickups and transducers have a very high output impedance. In order to get the optimum sound output we recommend an amplifier with low impedance input.