



#JWT Auto

**Precision Automotive
Professional masking tape**

Tape Structure

Backing JAPANESE WASHI PAPER

Adhesive ACRYLIC CLEAR ADHESIVE

#JWT Auto

Characteristic

JWT Auto, with its **water resistant** flat paper and its acrylic adhesive, is a perfect product for **Car Refinishing** when **high temperature's** (up to 120°) and **fine line results** are required.

Thanks to its conformability, it is **suitable for small and curved car body parts** like profiles, bumpers, head & bottom lights and car handles. It can be applied to different surfaces like Aluminum, Plastic, Rubber, Glass and painted surfaces without leaving adhesive residues.

JWT Auto, thanks to its thinness is specifically recommended for all masking **applications with extremely narrow grooves** where other traditional masking tapes aren't suitable.

CHARACTERISTICS	UNITS	STD. VALUES	TOLER.	TEST METHOD
Total Weight	g/m ²	83	± 10%	ISO 536
Total Thickness	µm	85	± 10%	AFERA 5006
MD tensile strength	N/cm	> 24		AFERA 5004
MD elongation at break	%	> 3		AFERA 5004
Adhesion to steel plate	N/cm	> 1,1		AFERA 5001

Available colours: YELLOW

Temperature resistance: 120°C (60 min)

Ultra Flat Paper


Figures shown refer to average values only, based on tests carried out in conditioned laboratory and are not valid for specification. The company reserves the right to modify or change the products at any time without notice. All information has to be intended as generic advise for the use of products. Users have to verify the suitability of each tape in actual application under specific conditions.

DATE OF ISSUE: 07/04/16

REV_01_230516



IN TAPE WE TRUST

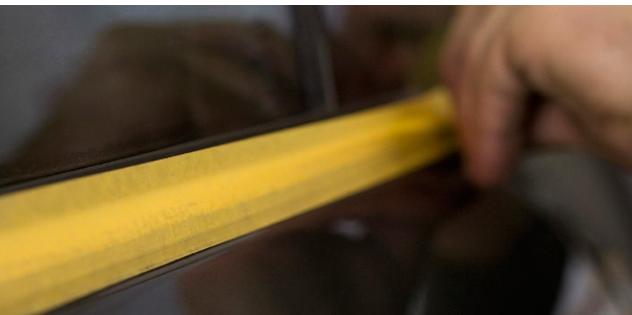

#JWT Auto


Precision Automotive

Professional masking tape

Application fields



Technical Features



PPM tapes must be stored in a dry location, protected from direct sunlight exposure and from freezing. Storage temperatures should be as close as possible to room temperature; suggested storage temperature should range from 15 to 25°C with max. relative humidity of 60%.

Make sure the surface you wish to place the tape on is cleaned, dried and free from oil and dust.

It is suggested not to apply the tape with temperatures lower than 10°C.

With a storage temperature lower than 10°C, it is always suggested temperature reconditioning of the tape at room temperature (15°C - 25 °C) before its use.

Shelf life from date of manufacture:

(no yellowing and < 10% loss in performance at 23 °C, 50 % humidity) is considered 12 months for Slit rolls and 6 for Jumbo rolls

PPM does not take responsibility for the defective material is not stored and used in accordance with the conditions listed above.

Follow us on:



www.ppmindustries.com - www.ppmindustries.co.uk