

Product:

25 Micron White Polypropylene Acrylic

Typical Applications:

- Carton Sealing Tape
- Hand applied
- High & low temperature


Advantages & Benefits:

- Excellent adhesion
- Good temperature resistance
- Adhesive has excellent UV resistance
- Solvent free adhesive

Construction:

- Clear Bi-orientated polypropylene film
- White Acrylic (Water Based) Adhesive
- Available unprinted & printed up to 3 colours*
- Widths available - 12mm - 144mm*
- Lengths available - 33m - 1056m*

CONSTRUCTION

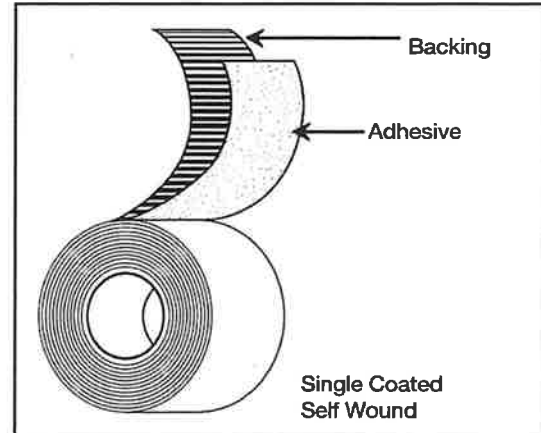

*Lead times may vary depending on number of colours printed. Minimum order quantities apply.

Technical Data

<u>Measure</u>	<u>Unit</u>	<u>Result & Tolerance</u>
Film thickness	Microns	25 +/- 5%
Adhesive coat weight	Grams/square metre	17 +/- 5%
Total thickness	Microns	43 +/- 5%
Peel adhesion (Afera 5001)	Newtons/25mm	4.0 +/- 5%
Elongation (Afera 5004)	%	<165
Tensile Strength (Afera 5004)	Newtons/cm	40 +/- 5%

Additional information

Tape performance is guaranteed for the first 6 months. Product must be stored at ambient temperature (Between 18c-23c), in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the batch identification number printed on the box. For optimum performance stock should be rotated and used within 12 months. The tapes have adhesive that are pressure sensitive so must be properly applied to ensure the best performance.

Physical and performance characteristics shown above are obtained following tests recommended by AFERA and PSTC. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

00125PA1000TPAC