


1524CW

REINFORCED ALUMINUM FOIL TAPE

VentureTape® 1524CW is a bi-directionally reinforced aluminum foil/polyethylene foil lamination tape coated with a special cold weather acrylic pressure sensitive adhesive that combines superior quick stick at normal temperatures with superior low temperature performance. Designed for use as a vapor seal for reinforced aluminum faced fiberglass or mineral wool thermal insulation, VentureTape 1524CW has excellent resistance to moisture and is recommended for use in high humidity conditions.

Product Construction

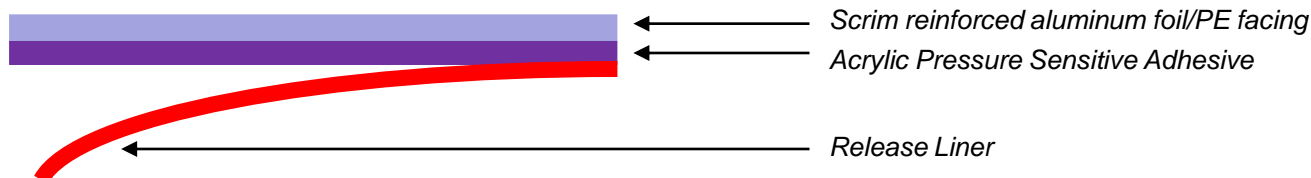

Features & Benefits

- High performance tape designed for use as a vapor seal on aluminum faced insulation products
- Bonds and seals well at low temperatures
- High performance solvent acrylic adhesive performs well over a wide temperature range
- In stock product available for immediate delivery

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness ^Ω	6.9 mils	0.18 mm	PSTC-133
Peel Adhesion ^Δ	40 oz/in	11.1 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	25 lb/in	112.9 N/25 mm	PSTC-131
Elongation	30 %	30 %	PSTC-131
Service Temperature	-40 to 185 °F	-40 to 85 °C	

^Ω - excluding liner

^Δ - 20 minute dwell

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- Standard roll widths: 48 mm, 72 mm
- Standard length: 50 m

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

www.venturetape.com

VentureTape®

GTA - NHT, Inc.
Venture Tape
30 Commerce Rd., Rockland, MA 02370
Tel 781-331-5900; Fax 781-871-0065
800-343-1076 (U.S.A.), 800-544-1024 (Canada)
Toll Free Fax 877-264-5490
www.venturetape.com

GTA
TAPES & ADHESIVES
a 3M Company