




## VK6064FR Double Sided Fire Retardant Foam Tape

### Product description

- Foamed Acrylic Tape
- Colour: White
- Flame retardant

### Construction

- Red PE Liner
- Acrylic adhesive

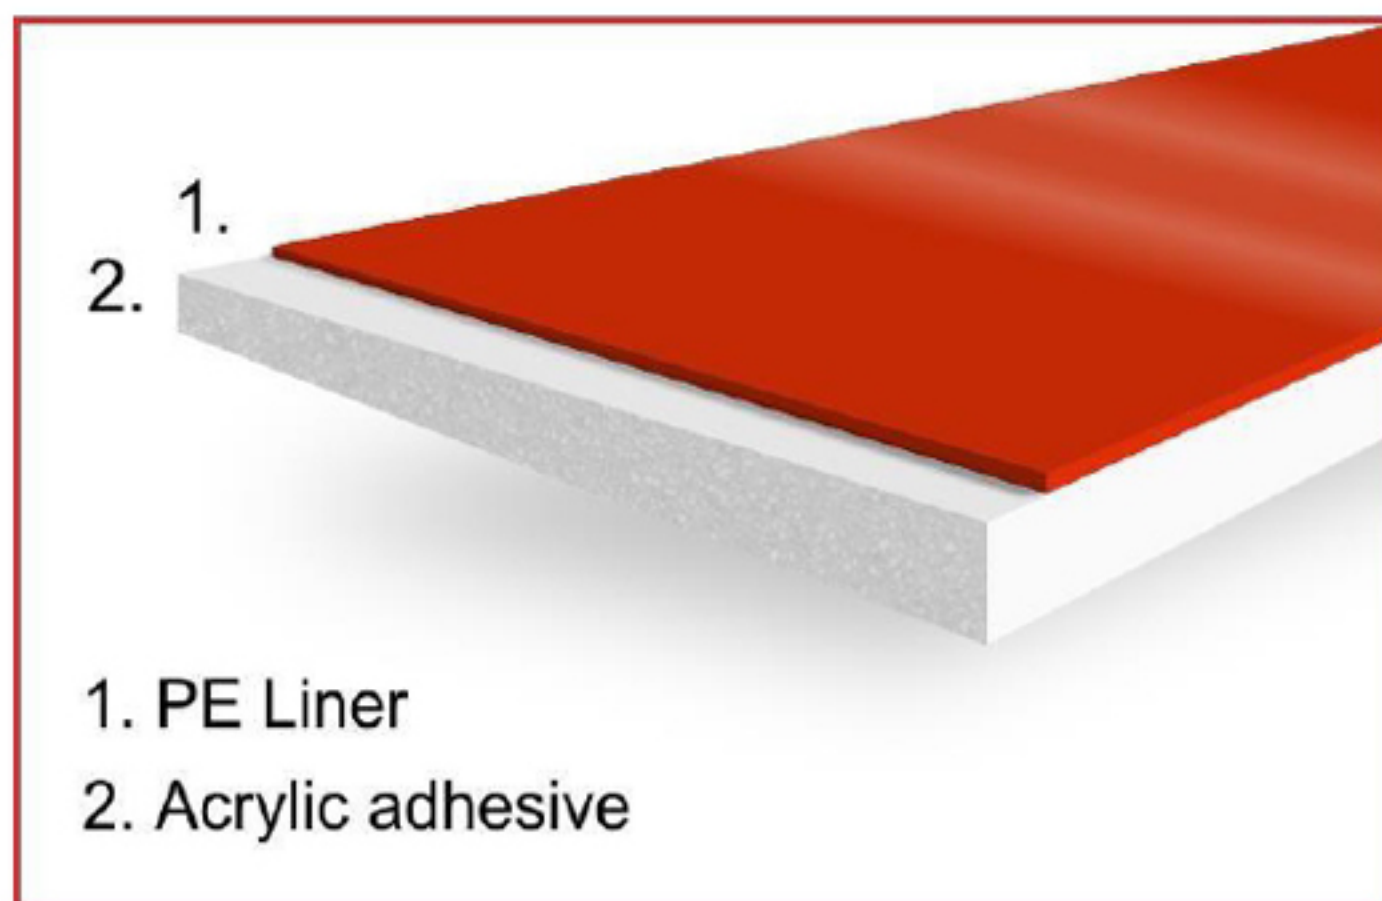

### Technical data

Item	Unit		Spec.		Test method
Thickness	mm	in	0.64(±0.1)	0.025(±0.004)	-
Density	kg/m <sup>3</sup>	lb/ft <sup>3</sup>	1500	94	-
180° Peel Strength	g/25mm	lb/in	2100	4.7	ASTM-D-3330 (Stainless steel, room temp)
Tensile Strength (T-Block Test)	g/cm <sup>2</sup>	lb/in <sup>2</sup>	8400	119	ASTM-D-897 (Aluminium, room temp)
Dynamic Shear	g/cm <sup>2</sup>	lb/in <sup>2</sup>	4500	64	ASTM D-1002 (Stainless steel, room temp, after 20min)
Dynamic Shear	g/cm <sup>2</sup>	lb/in <sup>2</sup>	7900	112	ASTM D-1002 (Stainless steel, room temp, after 24hrs)
Temperature Resistance (Short Term)	°C	°F	160	320	-
Temperature Resistance (Long Term)	°C	°F	100	212	-
Low Temp. Resistance	°C	°F	-40	-40	-
UV Resistance	-	-	Good	-	-

5. The users should take test before application so as to ensure suitability for their special purpose and technique.