

# ALUW-LED

## Construction:

- Steel housing and chassis
- Extruded aluminum cover
- Diffuser is .125" thick formed white smooth acrylic


## Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**

## Notes:

- Mounts to standard J-Box with anchor holes top and bottom
- Horizontal or vertical mounting
- ADA compliant
- Optinal battery backup
- UL and CUL listed **DAMP** location
- LED Components
  - Replaceable Module
  - CRI > 80
  - Dimming (10% or 1%)
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

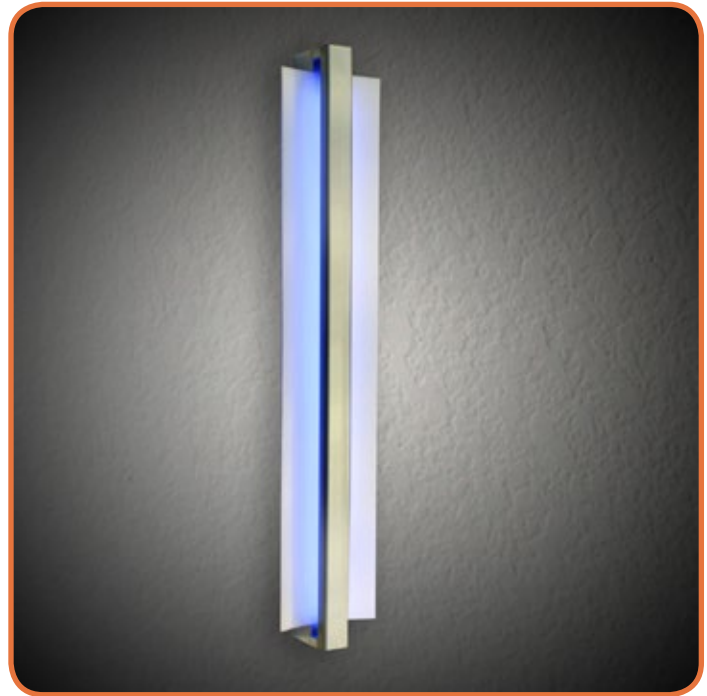

<b>ALUW-24</b>	<b>ALUW-36</b>	<b>ALUW-48</b>
Height - 23"	Height - 34 3/4"	Height - 46 3/4"
Depth - 3 3/4"	Depth - 3 3/4"	Depth - 3 3/4"
Width - 6 1/4"	Width - 6 1/4"	Width - 6 1/4"
MC - 12 1/2"	MC - 17 3/8"	MC - 23 3/8"

WALL

CEILING

PENDANT

OUTDOOR

## ORDERING INFORMATION

Example: ALUW-36-LED-U-32W-4-T6-WSA

--	--	--	--	--	--	--	--

Model	Cage	Voltage	Lamping	Kelvin	Finish	Diffuser	Options
<b>ALUW-24-LED</b>		U 120-277v	<b>18w</b> LED / 2000lm (111 lm per watt)	<b>2</b> 3000K <b>4</b> 4000K	<b>B1</b> Satin Black <b>T6</b> Pewter <b>Z3</b> Text Bronze	<b>WSA</b> White Smooth Acrylic	<b>DIM</b> LED dimming driver (0 - 10v) Dimming to 10% ( <b>Included</b> )
<b>ALUW-36-LED</b>			<b>32w</b> LED / 3675lm (117 lm per watt)	<b>Optional</b> <b>3</b> 3500K	<b>Optional Finishes</b> (see Price List) <b>M13</b> Anod Silver <b>T4</b> Shimmer Gray <b>W13</b> Pearl Beige <b>P9</b> Brushed Nickel <b>M16</b> Antique Brass		
<b>ALUW-48-LED</b>			<b>42w</b> LED / 4900lm (117 lm per watt)				

**Battery Backup Options**  
**BB10** 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com

