

BVPW-LED

Construction:

- Steel housing and chassis
- Clear tempered glass lens


Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**

Notes:

- Integral mounting plate; keyhole slots left and right
- Optional Photocell – specify voltage
- Optional Battery backup
- Dark Sky compliant
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

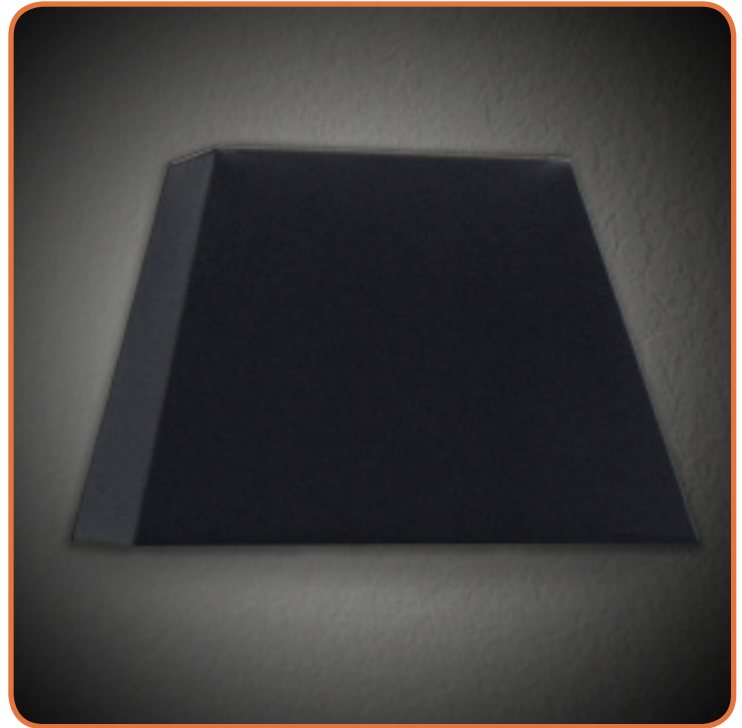

WALL

CEILING

PENDANT

OUTDOOR

BVPW-9

Height - 9 1/4"
 Width - 16"
 Depth - 10 3/4"



ORDERING INFORMATION

Example: **BVPW-9-LED-U-18W-4-B1-CEG-T2-21-01**

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

Model	Cage	Voltage	Lamping	Kelvin	Finish	Diffuser	Options
BVPW-9-LED		U 120 - 277	18w LED / 2000lm (111 lm per watt) 36w LED / 4000lm (111 lm per watt)	2 3000K 4 4000K Optional 3 3500K	B1 Satin Black Z1 Satin Bronze Z3 Text Bronze Optional (See Price List) W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	CEG Clear Tempered Glass	21 Photocell - <i>See Notes</i> -01 120 volt -02 277 volt 42 All Aluminum Construction Battery Backup Options BB10 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

