

# BVWW-LED

## Construction:

- Steel housing and chassis
- Clear tempered glass lens


## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Integral mounting plate; keyhole slots left and right
- Optional aluminum construction (painted finish only)
- Optional battery backup
- Dark Sky compliant
- UL and CUL listed **WET** location
- LED Components
  - Replaceable Module
  - CRI > 80
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

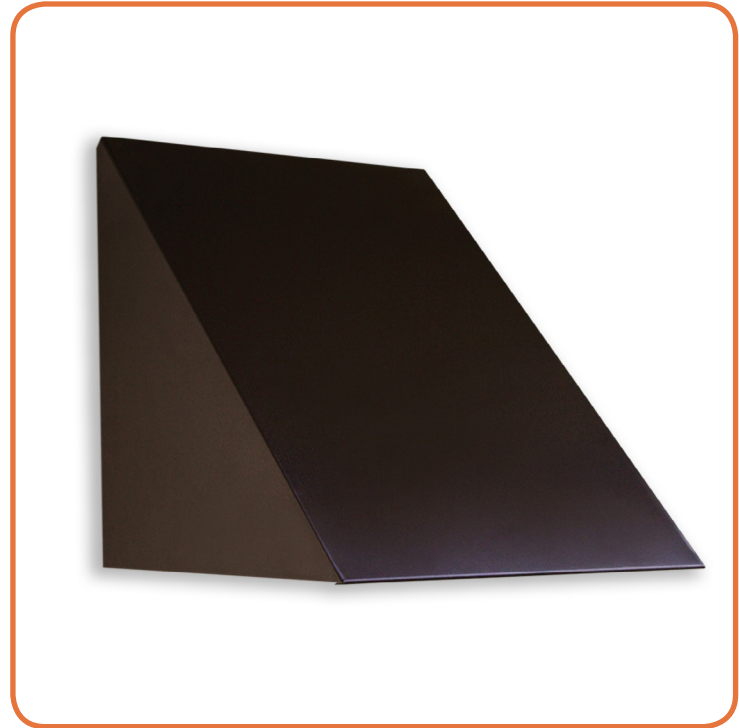

## BVWW-13

Height - 13 1/2"

Width - 12"

Depth - 13 3/4"



## ORDERING INFORMATION

**Example: BVWW-13-LED-O4B-4-B2-CEG**

## BVWW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		<b>B1</b> Satin Black <b>B2</b> Text Black <b>Z1</b> Satin Bronze <b>Z3</b> Text Bronze <b>W1</b> Yolk White <b>W2</b> Gloss White <b>T4</b> Shimmer Gray <b>M13</b> Anod Silver <b>T6</b> Pewter <b>W13</b> Pearl Beige	<b>CEG</b> Clear Tempered Glass	<b>DIM</b> LED dimming driver (0 - 10v) <b>DIMLD</b> Line Voltage /TRIAC/ELV/120v Consult Factory  <b>90CRI</b> Consult Factory  <b>42</b> All Aluminum Construction  <b>21</b> Photocell - See Notes -01 120 volt -02 277 volt  Optional Voltage - <b>347V</b> Input voltage to 347v  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes
<b>13-LED</b>	<b>O2B</b>	15	2000	0-10v	NO	<b>Optional</b> 3 3500K		<b>Optional</b> (See Price List) <b>M17</b> Brass Powder <b>M16</b> Antique Brass <b>P2</b> Brushed Alum <b>P9</b> Brushed Nickel		
	<b>O4B</b>	29	4000	0-10v	NO					



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com



Revision: 06/24/2020