

DYRH-LED

Construction:

- Steel Housing and Chassis
- Diffuser is White Textured Polycarbonate
- Double Rigid Stems Standard


Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**

Notes:


- Mounts to Standard Junction Box
- UL and CUL listed **DAMP** location
- Optional Battery Backup
- Custom Stem Lengths available - Consult Factory
- LED Components
 - Replaceable Modules
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

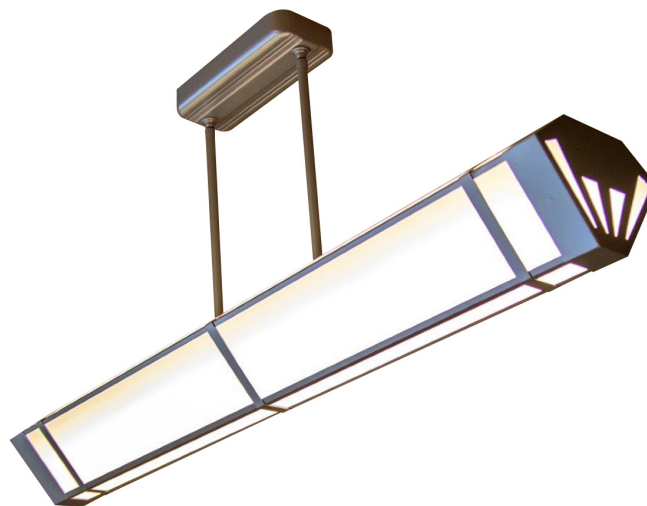

Shown as DYRH-50

	DYRH-26	DYRH-50
A	26"	50"
B	6"	6"
C	9"	9"
D	12"x 6"	12"x 6"
OAH	24"	24"

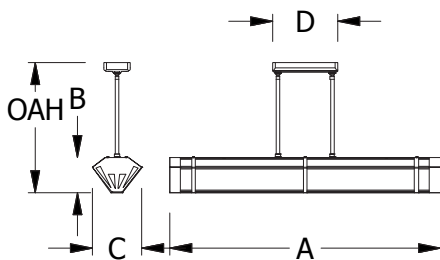

WALL

CEILING

PENDANT

OUTDOOR

ORDERING INFORMATION

Example: **DYRH-50-LED-U-16W-4-M13-WTP-2S10-24OAH**

--	--	--	--	--	--	--	--

Model	Cage	Voltage	Lamping	Kelvin	Finish	Diffuser	Options
DYRH-26 -LED		U 120 - 277	12w LED / 2245lm 24w LED / 4350lm	2 3000K 4 4000K Optional 3 3500K	B1 Satin Black W2 Gloss White Z1 Satin Bronze Z3 Text Bronze T6 Pewter M13 Anod Silver Optional (See Price List)	WTP White Textured Polycarbonate	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included) (Suspension Systems) 2S10 - Dual Rigid 10deg Swivel Stem Battery Backup Options BB10 Battery backup unit providing 10 Watts (1350lm) for 90-Minute
DYRH-50 -LED			24w LED / 4385lm 36w LED / 6605lm		W1 Yolk W3 Text White B2 Text Black T4 Shimmer Gray W13 Pearl Beige		



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

