

HOVW-LED

Construction:

- Steel housing and chassis
- Diffuser is .060" thick white textured polycarbonate


Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**

Notes:

- Center lockup – hardware included
- Custom cage styles available
- ADA compliant
- Optional Battery Backup
- UL and CUL listed **DAMP** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

| | |
|-----------|--|
| Type: | |
| Job Name: | |

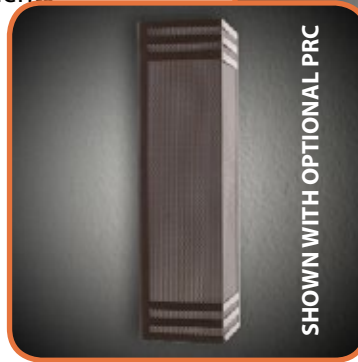

HOVW-13

Height - 13"
Width - 7 1/2"
Depth - 4"

HOVW-18

Height - 18"
Width - 7 1/2"
Depth - 4"



WALL

CEILING

PENDANT

OUTDOOR

ORDERING INFORMATION

Example: HOVW-13-LED-U-18W-3-B1-WTP-PRC

| | | | | | | | |
|--|--|--|--|--|--|--|--|
| | | | | | | | |
|--|--|--|--|--|--|--|--|

| Model | Cage | Voltage | Lamping | Kelvin | Finish | Diffuser | Options |
|--------------------|------|--------------------|--|-----------------------------------|--|--|---|
| HOVW-13-LED | | U 120 - 277 | 18w LED / 2000lm (111 lm per watt) | 2 3000K 4 4000K | B1 Satin Black W2 Gloss White Z1 Satin Bronze Z3 Text Bronze | WTP White Textured Polycarbonate Optional Cage Accent | DIM LED dimming driver (0 - 10v) Dimming to 10% (Included) |
| HOVW-18-LED | | | 21w LED / 2450lm (117 lm per watt) | Optional 3 3500K | Optional Finishes (see Price List) W1 Yolk T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige P2 Brushed Alum P9 Brushed Nickel M16 Antique Brass | PRC Perforated Screen Complete | Battery Backup Options BB10 10 Watts (1170lm) for 90-Minutes |



28435 Industry Drive., Valencia, California 91355
West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
East Coast Sales: 866-350-0991 • fax 866-490-5754
www.lightwayind.com • sales@lightwayind.com

