

LCBH-LED

Construction:

- Bottom Diffuser is a White Textured Acrylic
- Side Diffuser is a Translucent Bonded Linen Material with a variety of color options.
- Canopy and housing are steel with a powder coated finish
- (4) Sets of 3/8" sq Aluminum bars accent the side of the lens

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Mounting Kit Included for standard J-box
- Multiple canopy and stem options available.
- Custom overall heights available
- The LCLH has a typical leadtime of 6weeks, consult with factory for any minimum order quantities and setup fees
- UL and CUL listed **DAMP** location
- LED Array
 - Replaceable Module
 - CRI > 80
 - Dimming (10% or 1%)
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components
- For a ceiling flush mounted version see the **LCBC**

Type:	
Job Name:	



Shown with White Linen Acrylic Side Lens & 1SLM45 Stem



WALL

CEILING



PENDANT

OUTDOOR


DIFFUSER OPTIONS




LCBH-LED

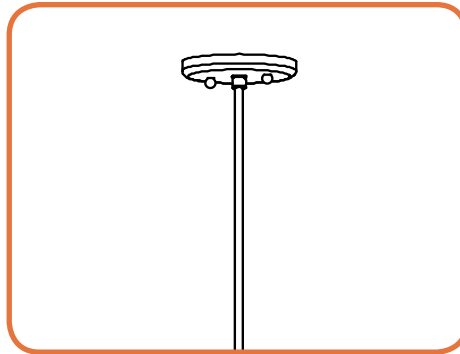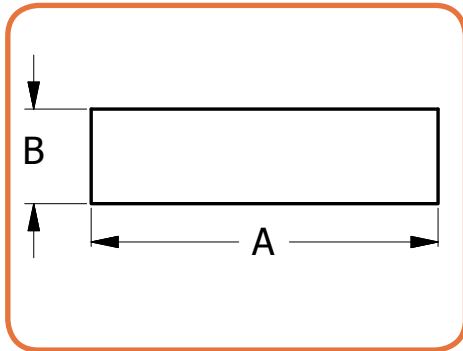


STEM OPTION -1S15

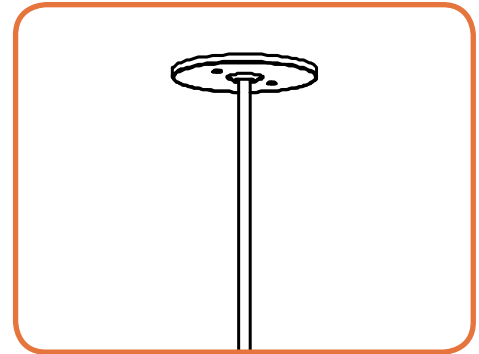

STEM OPTION -1SLM45

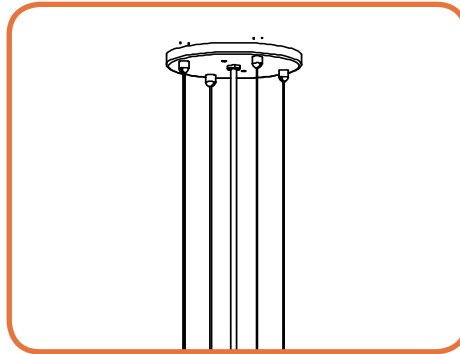

STEM OPTION -4AC-xSJ

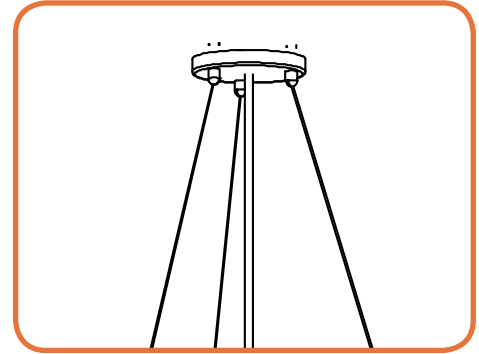

STEM OPTION -3AC-xSJ

	DIM 'A'	DIM 'B'	OAH
LCBH-12	12.75"	4.5"	12"
LCBH-15	15.5"	4.5"	12"
LCBH-19	19.5"	5.25"	12"
LCBH-24	24.5"	8"	15"
LCBH-30	30.5"	8"	24"
LCBH-36	36.5"	8"	24"

ORDERING INFORMATION

Example: LCBH-15-LED-U-20W-4-W2-CTA-DIM-1SLM45-120AH

Model	Cage	Voltage	Lumens/Source	Kelvin	Finish	Diffusers	Options	
LCBH-12-LED		U 120 - 277	2E26 Medium Base (NL) 13w 1,484 lm (Dim) 10ACw 1,065lm (DimLD) 15ACw 1,724lm (DimLD)	2 3000K 4 4000K	B1 Satin Black M13 Anod Silver T6 Pewter W2 Gloss White Z1 Satin Bronze Z3 Text Bronze	WLA White Linen Acrylic CTA Chocolate Textured Acrylic	DIM LED dimming driver (0 - 10v) <i>(Included with On Board Driver only)</i>	
LCBH-15-LED			2E26 Medium Base (NL) 20w 2,325 lm (Dim) 15ACw 1,724lm (DimLD) 23ACw 2,540 lm (DimLD)	Optional 3 3500K	Optional <i>(see Price List)</i>	Optional Trim Options <i>(Consult Factory)</i>	DIMLD Line Voltage /TRIAC/ELV/120v <i>(Included with DirectAC Boards only)</i>	
LCBH-19-LED			4E26 Medium Base (NL) 36w 4,000 lm (Dim)		W1 Yolk W3 Text White B2 Text Black T4 Shimmer Gray W13 Pearl Beige	RTA Rapid Textured Acrylic BTA Black Textured Acrylic	(Suspension Systems) 1S15 -Single Stem 15 degree swivel 1SLM45 -Single Stem 45 degree swivel 4AC-(4) Aircraft Cable 3AC -(3) Aircraft Cable	
LCBH-24-LED							Bottom Diffuser	OCCHFA Concealed Occupancy Sensor <i>See Sensor Resource Sheet</i>
LCBH-30-LED							WTA White Textured Acrylic	Battery Backup Options <i>(Not available with E26)</i>
LCBH-36-LED				8E26 Medium Base (NL) 42w 4,900 lm (Dim) 84w 9,800 lm (Dim) 126w 14,700 lm (Dim)				BB10 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

