

MERW-600-LED

Construction:

- Steel housing and chassis
- Diffuser is .10 extruded white acrylic
- 3/8" Sq Accent bars and rings are extruded aluminum

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Keyhole slots top and bottom
- Top and bottom white acrylic lens - standard
- Not all material and accent styles are available
- Optional photocell (21) increases fixture depth 1 1/2"
- Optional lens cover (ALC) eliminates up/down light
- Optional battery backup
- Optional top & bottom lens cover
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components
- You may also like the [MANW](#) or [MENW](#) Series

Type:	
Job Name:	




WALL

CEILING


PENDANT

OUTDOOR

DESIGN OPTIONS (Choose your cage design)

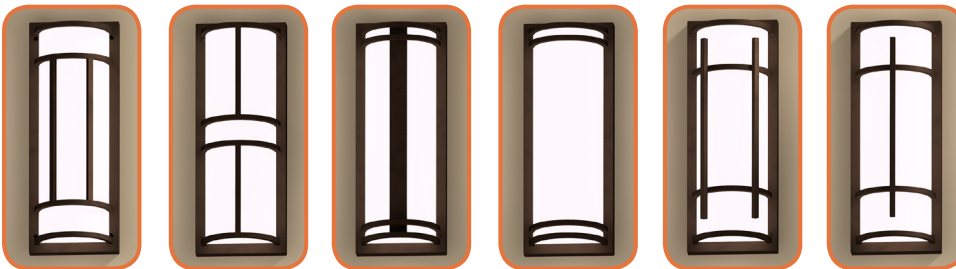


MERW-A MERW-B MERW-C^{D1} MERW-D MERW-E MERW-F^{D1}

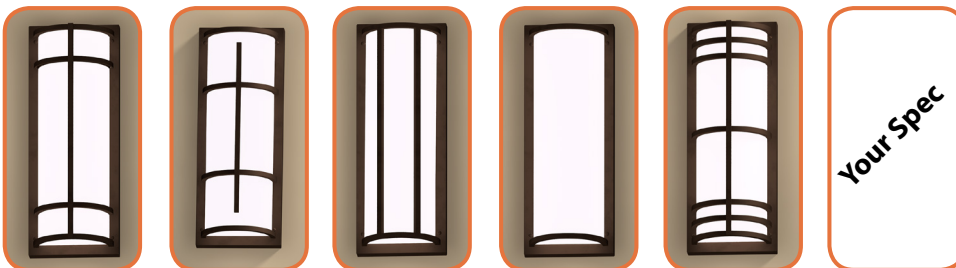

MERW-G^{D1} MERW-H^{D1} MERW-I MERW-J MERW-K^{D1} MERW-X

Fixture Overall Dimensions

- "H" - 12" - 16" - 18" - 26" - 38" - 50"
- "W" - 6 1/2"
- "D" - 4"
- "D1" - 4 3/8"
- "MC" - 6" - 8" - 9" - 13" - 19" - 25"
- See 900 or 1100 Series for other width options



⁽¹⁾ Contact factory for assistance



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
www.lightwayind.com • sales@lightwayind.com




MERW-600-LED

OPTIONAL CAGE ACCENTS


(Not required, leave blank if undesired)

1) Optional Accent Location


(Shown as "A" cage. Others are Similar)




(SC)
Screen
Complete



(CC)
Center
Complete



(CH)
Center
Half




(EC)
End
Complete

2) Accent Material

(Required if Accent is chosen)




(S) Solid




(P) Perforated



(F) Filigree



(M) Mesh



(W) Waffle



(X) Custom⁽¹⁾

⁽¹⁾ Contact factory for assistance

ACCENT AVAILABILITY CHART BY CAGE STYLE

	A	B	C	D	E	F-H	I	J	K
SC	S,P,M,W	S,P,M,W	S,P,W	S,P,M,W	S,P,M,W	S,P,M,W	S,P,W	S,P,M,W	S,P,W
CC	S,P	S,P,M,F,W	S,P,W	S,P,M,W	S,P,M,W	S,P,M,W	---	---	S,P,W
CH	S,P,M,W	---	---	---	S,P,M,W	---	S,P,M,F,W	---	---
EC	S,P,W	S,P,W	S,P,W	S,P,W	S,P,W	S,P,W	---	---	S,P,W

ORDERING INFORMATION

Example: MERW-626-LED-G-U-21W-4-T4-WSA

Model	Cage	Voltage	Lamping	Kelvin	Finish	Diffuser	Options
MERW-612-LED	A	U 120 - 277	<i>On Board Driver Engine</i> 13w LED / 1484lm DirectAC Boards 10ACw LED / 1065lm 15ACw LED / 1724lm	2 3000K 4 4000K Optional 3 3500K	B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk W2 Gloss White W3 Text White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) P2 Brushed Alum P9 Brushed Nickel M16 Antique Brass	WSA White Smooth Acrylic Optional Cage Accents (See Page 2) Material F Filigree P Perforated Screen M Wire Mesh W Waffle Pattern Style SC Screen Complete CC Center Complete EC Ends Complete CH Center Half OX Custom	DIM LED dimming driver (0 - 10v) <i>(Included with On Board Driver only)</i> DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page <i>(Included with DirectAC Boards only)</i> 21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt ALC Aluminum Lens Cover - See Notes Battery Backup Options <i>(On Board Driver Engine only)</i> BB10 10 Watts (1170lm) for 90-Minutes
	B						
	D						
	E						
	F						
	G						
	H						
	I						
	J						
	K						
MERW-616-LED	X		<i>On Board Driver Engine</i> 11w LED / 1225lm				
MERW-618-LED			14w LED / 1600lm				
MERW-626-LED			21w LED / 2450lm				
MERW-638-LED			29w LED / 3412lm				
MERW-650-LED			32w LED / 3675lm 29w LED / 3529lm 42w LED / 4900lm				



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

