

MNBW-LED

Construction:

- Steel housing and chassis
- Lens is white textured or smooth polycarbonate


Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**

Notes:

- Center lockup – hardware include (14")
- Bi-directional keyhole slots left and right (16")
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

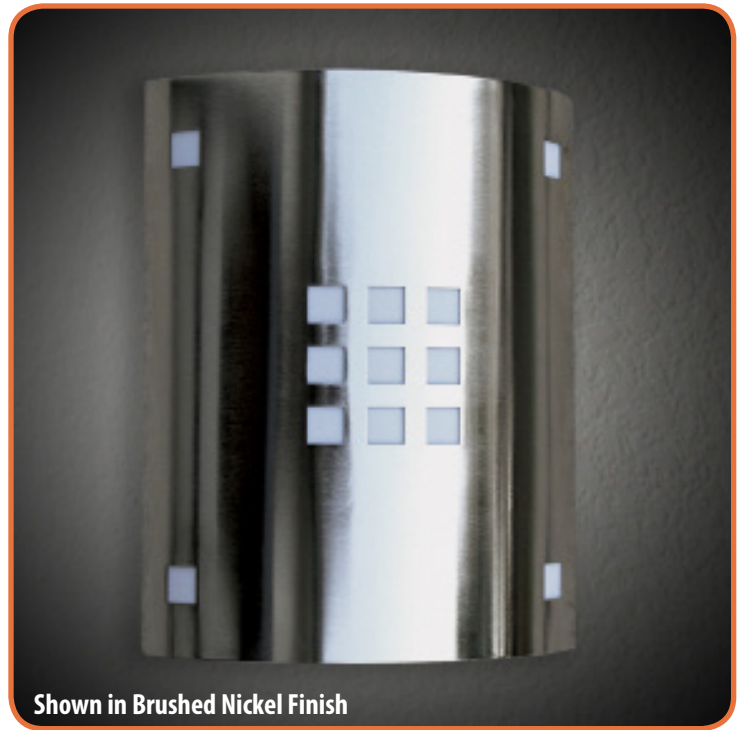

Shown in Brushed Nickel Finish



MNBW-14

Height - 14"
Width - 14 1/4"
Depth - 6 1/4"

MNBW-16

Height - 16"
Width - 13 1/2"
Depth - 6 1/4"

WALL

CEILING

PENDANT

OUTDOOR

ORDERING INFORMATION

Example: MNBW-16-LED-U-23W-3-P2-WTP

--	--	--	--	--	--	--	--

Model	Cage	Voltage	Lamping	Kelvin	Finish	Diffuser	Options
MNBW-14-LED		U 120 - 277	13w LED / 1,484 lumens (114 lm per watt) 23w LED / 2293 lumens (99 lm per watt)	2 3000K 4 4000K Optional 3 3500K	B1 Satin Black Z1 Satin Bronze Z3 Text Bronze Optional (See Price List) W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Annod Silver T6 Pewter W13 Pearl Beige P2 Brushed Alum P9 Brushed Nickel M16 Antique Brass	WTP White Textured Polycarbonate WSP White Smooth Polycarbonate Optional Lens Material (See Price List) BSA Blue Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included)
MNBW-16-LED			13w LED / 1,484 lumens (114 lm per watt) 23w LED / 2293 lumens (99 lm per watt)				



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

