

PDLH-LED

Construction:

- Steel housing and chassis
- Bottom lens is white frosted acrylic
- Field adjustable aircraft cable


Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**


Notes:

- Mounts to standard junction box
- UL and CUL listed **DAMP** location
- Optional battery backup PDLC-36 only
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

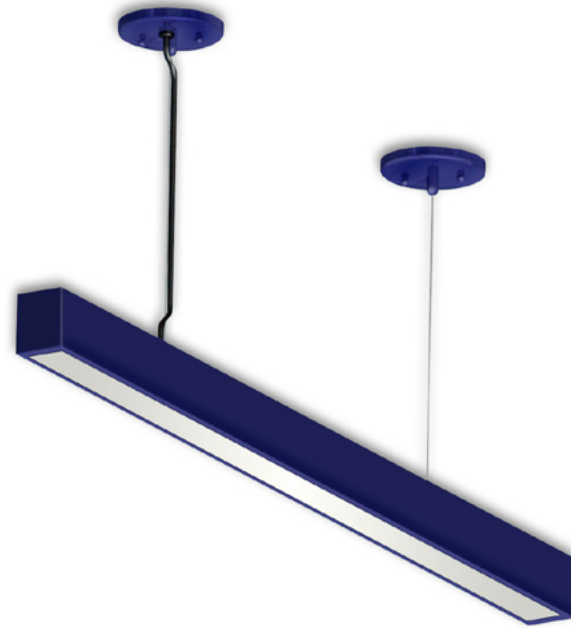

	PDLH-24	PDLH-36	PDLH-47
A	24"	36"	47"
B	3"	3"	3"
C	2 1/2"	2 1/2"	2 1/2"
D	12"	24"	35"
OAH	6 - 24"	6 - 24"	6 - 24"



WALL

CEILING

PENDANT

OUTDOOR

ORDERING INFORMATION

Example: PDLH-24-LED-U-8W-4-B1-WFA-2AC-BSJ

--	--	--	--	--	--	--	--

Model	Cage	Voltage	Lamping	Kelvin	Finish	Diffuser	Options
PDLH-24 -LED		U 120 - 277	8w LED / 1100lm (137 lm per watt) 21w LED / 2450lm (116 lm per watt)	2 3000K 3 3500K 4 4000K	B1 Satin Black W2 Gloss White Z1 Satin Bronze Z3 Text Bronze Optional (See Price List)	WFA White Frosted Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included) (Suspension Systems) 2AC - Aircraft Cable w/ WSJ - White "SJ" Cord BSJ - Black "SJ" Cord GSJ - Gray "SJ" Cord Battery Backup Options Available in 36" and 47" only BB08 Battery backup unit providing 8 Watts (1080lm) for 90-Minute
PDLH-36 -LED			32w LED / 3675lm (114 lm per watt)		W1 Yolk W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige P2 Brushed Alum P9 Brushed Nickel M16 Antique Brass		
PDLH-47 -LED			16w LED / 2200lm (137 lm per watt) 42w LED / 4900lm (116 lm per watt)				



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

