

PFGB-LED

Construction:

- Extruded Round Aluminum Housing
- Flush Mounting Base
- Clear Polycarbonate Vandal-Resistant Lens


Light Source:

- Integrated LED

Notes:

- Vandal-resistant screws
- Mounting kit with 8" anchor bolts included
- Mounting kit may ship separately for pre-installation
- Custom heights available – consult Factory
- Optional retrofit base for existing anchor patterns.
11½" Dia. x 1½" H
- CSA listed **WET** location, UL 1598/8750
- LED Components
 - CRI > 80
 - 120-277V or 347V
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

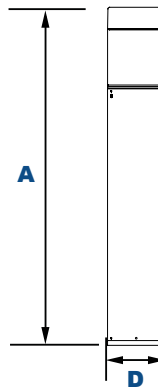


PFGB - 42
 'A' Height - 41 ½"
 'D' Diameter - 7"
 Base - 7"



ORDERING INFORMATION

Example: PFGB-42-LED-S1A17-4-B99-CSP

PFGB

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Deliver Lumens	Dimming	Energy Star					
42-LED	S1A17	17	1450	0-10v	NO	2 3000K 4 4000K 5 5000K		B99 Black Z99 Bronze	CSP Clear Smooth Polycarbonate	RETROBASE large base for existing anchor  GFI GFI Receptacle GS 180° Glare Shield to match finish X HGT Custom height Battery Backup Options BB10 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

