

# VTNV-LED

## Construction:

- Steel chassis and end caps
- Diffuser is white smooth acrylic


## Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**

## Notes:

- Mounts to standard J-Box with slotted anchor holes
- Optional battery backup (36" or 48" only)
- Vertical or Horizontal mounting
- ADA compliant
- UL and CUL listed **DAMP** location
- LED Components
  - Replaceable Module
  - CRI > 80
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

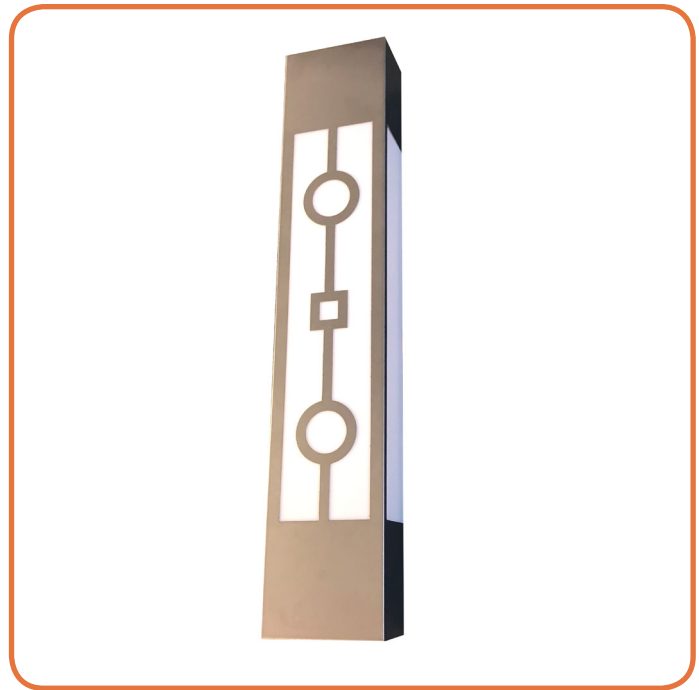

WALL  
 CEILING  
 PENDANT  
 OUTDOOR

### VTNV-24-LED

Height - 4 1/4"  
 Depth - 3"  
 Length - 24"

### VTNV-36-LED-

Height - 4 1/4"  
 Depth - 3"  
 Length - 36"

### VTNV-48-LED-

Height - 4 1/4"  
 Depth - 3"  
 Length - 48"



## ORDERING INFORMATION

**Example: VTNV-36-LED-U-30W-4-Z1-WSA**

Model	Cage	Voltage	Lamping	Kelvin	Finish	Diffuser	Options
<b>VTNV-24-LED</b>		U 120 - 277	20w LED / 2460lm	2 3000K 4 4000K	T6 Pewter W2 Gloss White Z1 Satin Bronze Z3 Text Bronze	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included)
<b>VTNV-36-LED</b>			30w LED / 3690lm	Optional 3 3500K	Optional (See Price List)		
<b>VTNV-48-LED</b>			40w LED / 4920lm		W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver W13 Pearl Beige		Battery Backup Options BB10 10 Watts (1170lm) for 90-Minute



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com

