


SPRO®



DHDVR06-B3-V2

6 Channel 4K DVR 5 in 1 (CVI / TVI / AHD / ANALOGUE / IP)

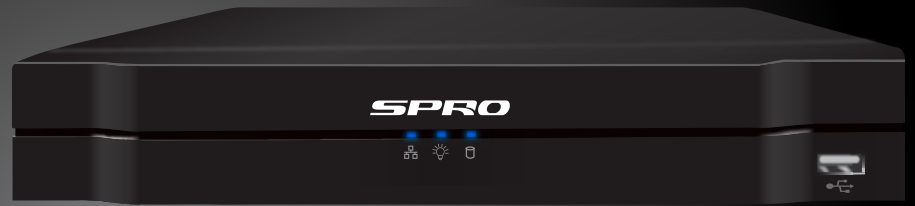

Key Features:

- 6 channel recording (4 channel BNC + 2 channel 8MP IP)
- 5 IN 1 (CVI / TVI / AHD / ANALOGUE / IP)
- P2P (no port forwarding required) - Apple app/Android app/Windows PC/Apple Mac
- 4K(1~7fps), 5MP(1~12fps), 4MP/3MP@15fps, 1080P/720P@25fps
- Audio over co-ax supported on all BNC Channels
- ONVIF 2.4 compatible
- IP spot via network (no convertor required)
- 4 channel playback at the same time
- Max 2 channels IP camera inputs, each channel up to 8MP, Max 48Mbps Incoming Bandwidth
- PTZ control over 1 co-ax cable (mouse control on DVR - area zoom & scroll zoom)
- Instant playback on one channel when others are on live viewing
- Smart search & email notification (snapshot)
- Intelligent feature : Facial & Tripwire detection (BNC channel only)
- Backup footage by video clip while viewing playback



SPECIFICATIONS

Model Number	DHDVR06-B3-V2	
Main Processor	Embedded processor	
Operating System	Embedded LINUX	
Video and Audio		
Input	6 channel (4 x BNC + 2 x IP)	
Standard	5 IN 1	4 channel CVI/TVI/AHD/ANALOGUE
	IP	2 channel (up to 8 Megapixel IP)

(continued)

Analog Camera Input	4 Channel, BNC	
HDCVI Camera	4K, 6MP, 5MP, 4MP, 1080P@25fps, 720P@50fps, 720P@25fps	
AHD Camera	5MP, 4MP, 3MP, 1080P@25fps, 720P@25fps	
TVI Camera	5MP, 4MP, 3MP, 1080P@25fps, 720P@25fps	
CVBS Camera	PAL/NTSC	
IP Camera Input	2 Channel, each channel up to 8MP	
Audio In/Out	1/1 RCA, Audio over co-ax supported on all BNC Channels	
Two-way Talk	Reuse audio in/out, RCA	
Display		
Interface	1 HDMI, 1 VGA	
Resolution	HDMI:	3840×2160, 2560×1440, 1920×1080, 1280×1024, 1280×720
	VGA:	1920×1080, 1280×1024, 1280×720
Display Split	1/4/6	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording		
Video/Audio Compression	H.265+/H.265/H.264+/H.264	
Resolution	4K, 6MP, 5MP, 4K-N, 4MP, 3MP, 4M-N, 1080P, 720P, 960H, D1, CIF	
Record Rate	Main Stream	Main stream: 1st channel 4K(7fps), 6MP(10fps), 5MP(12fps), 4MP/3MP(15fps)
	Extra Stream	Others: 4K-N(7fps), 4MP/3MP(15fps), 4M-N/1080P/720P/960H/D1/CIF (25fps) 960H(1~15fps), D1/CIF/QCIF(1~25fps)
Bit Rate	32Kbps ~ 6144Kbps Per Channel	
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop	
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Audio Compression	AAC(only for the 1st channel), G.711A, G.711U, PCM	
Audio Sample Rate	8KHz, 16 bit Per Channel	
Audio Bit Rate	64Kbps Per Channel	
Video Detection		
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips	
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis	

Playback & Backup

Sync Playback	1/4
Search Mode	Time/Date, MD & Exact search (accurate to second)
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

Network

Interface	1 RJ-45 port (100M)
Network Functions	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android Phone
Interoperability	ONVIF 2.42, CGI Conformant

Storage


Internal HDD	1 SATA port, up to 10TB
---------------------	-------------------------

Auxiliary Interface

USB Interface	2 ports(1 Rear), USB2.0
RS485	1 port, For PTZ Control

General

Power Supply	DC12V/2A
Power Consumption	<10W (without HDD)
Working Environment	-10°C ~+55°C / 0%~90%RH
Dimensions	Compact 1U, 260mm × 220mm × 40mm
Weight	0.9 KG(without HDD)

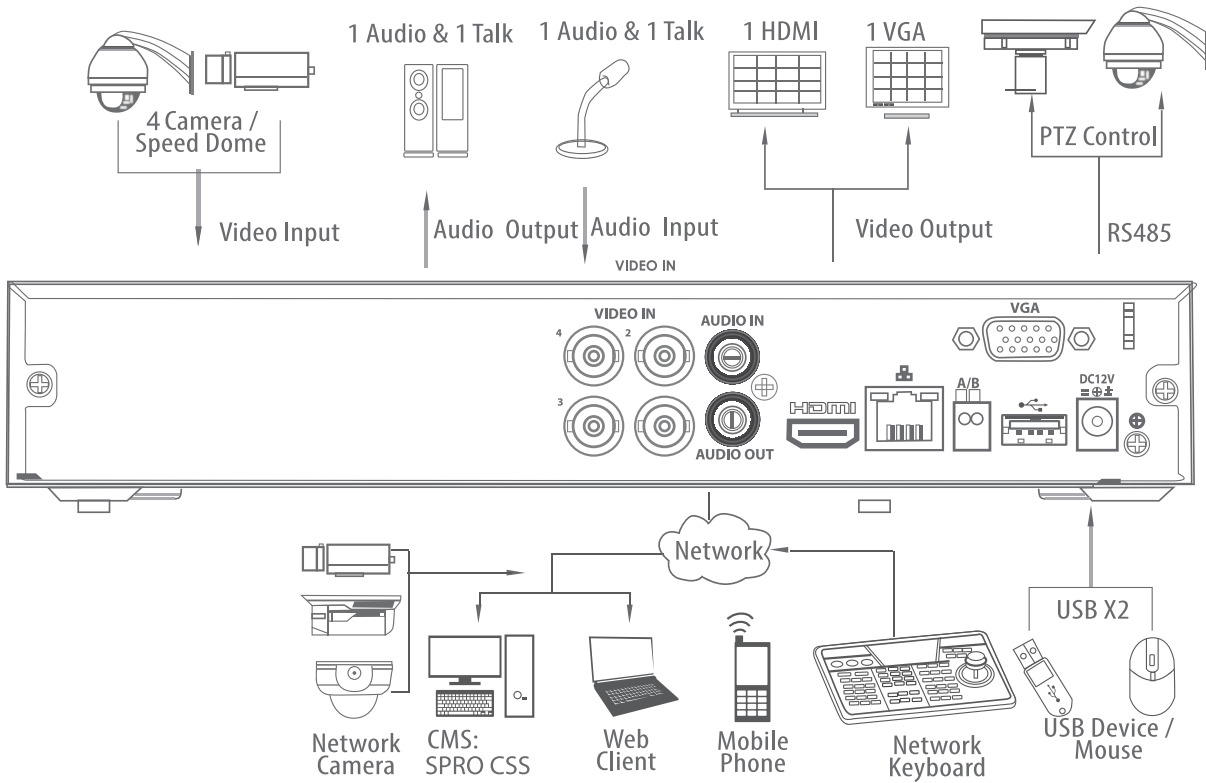

CCTV OUTLET

All specifications are subject to change without notice. Copyright © RealTime Ltd. All rights reserved