



## SPRO®

### DHIPQ40/28RW

4 Megapixel IP Small IR Bullet Camera



4 MEGAPIXEL



2.8MM



15m IR



IP66



#### Key Features:

- 4 Megapixel progressive scan CMOS
- H.264&MJPEG dual-stream encoding
- Max 20fps@4MP(2688X1520) or 25fps@3MP(2048×1536)
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer & CMS(SPRO CSS)
- 2.8mm fixed lens
- Max. IR LEDs Length 15m
- IP66
- DC12V/PoE

#### SPECIFICATIONS

Model Number	DHIPQ40/28RW
Image Sensor	4 Megapixel progressive scan CMOS
Effective Pixels	2688(H) x 1520(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1s~1/100000s
Min. Illumination	0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)
S/N Ratio	More than 40dB
Video Output	N/A
Camera Features	
Max. IR LEDs Length	15m



(continued)

(continued)

<b>Day/Night</b>	Auto(ICR)/Color/B/W	
<b>Backlight Compensation</b>	BLC / HLC / DWDR	
<b>White Balance</b>	Auto/Manual	
<b>Gain Control</b>	Auto/Manual	
<b>Noise Reduction</b>	3D	
<b>Privacy Masking</b>	Up to 4 areas	
<b>Lens</b>		
<b>Focal Length</b>	2.8mm	
<b>Max Aperture</b>	F2.0(F2.0)	
<b>Focus Control</b>	Manual	
<b>Angle of View</b>	H: 92°(81°)	
<b>Video</b>		
<b>Compression</b>	H.264/ H.264H/ H.264B/ MJPEG	
<b>Resolution</b>	4M(2688×1520)/3M(2048×1536)/1080P(1920×1080)/720P(1280×720)/ D1(704×576/704×480) /CIF(352×288/352×240)	
<b>Frame Rate</b>	Main Stream	4M(1 ~ 20fps)/3M(1 ~ 25fps)/1080P(1 ~ 25fps)
	Sub Stream	D1(1 ~ 25fps)
<b>Bit Rate</b>	H.264: 4kbps ~ 8192kbps	
<b>Corridor Mode</b>	Support	
<b>Audio</b>		
<b>Compression</b>	N/A	
<b>Interface</b>	N/A	
<b>Network</b>		
<b>Ethernet</b>	RJ-45 (10/100Base-T)	
<b>Wi-Fi</b>	N/A	
<b>Protocol</b>	IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS	
<b>Compatibility</b>	ONVIF 2.4	
<b>Max. User Access</b>	20 users	
<b>Smart Phone</b>	iPhone, iPad & Android	
<b>Auxiliary Interface</b>		
<b>RS485</b>	N/A	

(continued)

<b>Alarm</b>	N/A
<b>PIR Sensor Range</b>	N/A
<b>General</b>	
<b>Power Supply</b>	DC12V, PoE (802.3af)
<b>Power Consumption</b>	<3.7W(IR on)
<b>Working Environment</b>	-30°C~+60°C, Less than 95% RH
<b>Ingress Protection</b>	IP66
<b>Vandal Resistance</b>	N/A
<b>Dimensions</b>	Ø70mm × 165mm
<b>Weight</b>	0.38Kg(with package 0.44 Kg)

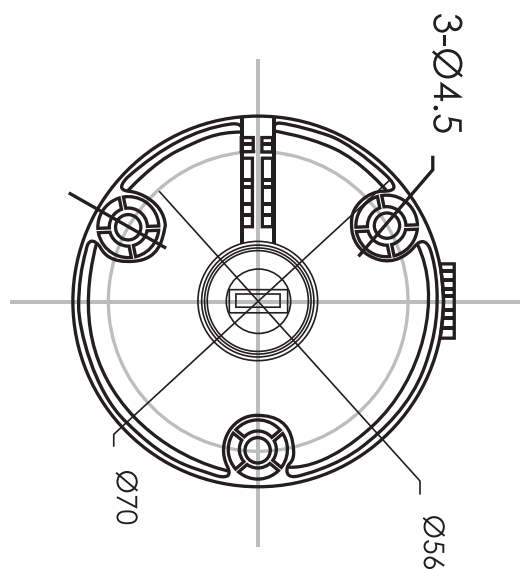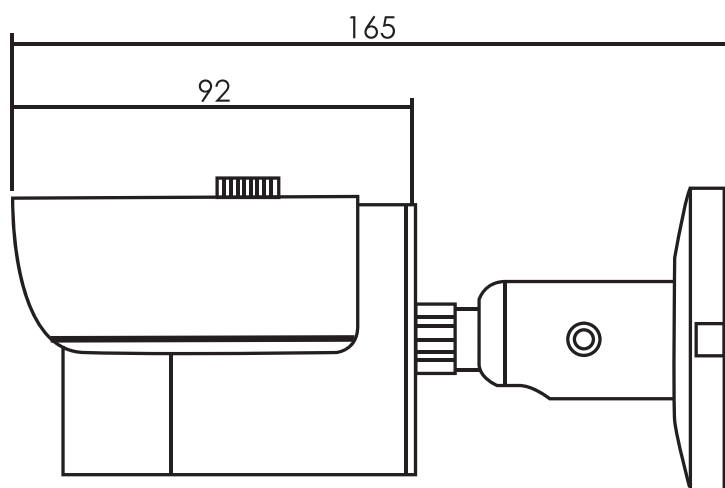

**CCTVOUTLET**

All specifications are subject to change without notice. Copyright © RealTime Ltd. All rights reserved