

# S700

You want to create memorable and individualized experiences for your customers while providing the highest in-cup-quality? The S700 is the answer: It merges the convenience and intelligence of a fully automatic machine with the passion and creativity of a two-step machine. With its groundbreaking iQFlow™ technology, ability to produce 160 espressos an hour and three-boiler system to meet all your steam and foam requirements, our S700 is here to help baristas unleash their full creative potential. So if you're looking for the best mix of human creativity, coffee competence, passion and advanced coffee machine technology, turn to the S700.

CAPACITY*	SINGLE	PARALLEL
Espresso	160	238
Coffee	109	141
Hot water	164	

\*Cups per hour according to DIN 18873



**8-INCH COMFORT DISPLAY**  
with incredibly simple operating concept and attractive product presentation



**iQFlow™**  
the groundbreaking technology that extracts more flavor for unrivaled in-cup-quality



**SPECIAL STEAM SPOUT**  
for professionals: with Autosteam or Autosteam Pro

**FRANKE**

MAKE IT WONDERFUL

# TECHNICAL DATA

## MACHINE MODELS



Model	Power
S700	380-415 V 3LNPE 50/60 Hz (16 A) 220-240 V 1LNPE 50/60 Hz (30 A) 200-220 V 3LPE 50/60 Hz (30 A) 208 V 2LPE 60 Hz (24 A) 380 V 3LNPE 50 Hz (16 A)
Dimensions	340 mm / 750 mm / 600 mm (W / H / D)
Weight (empty)	approx. 58 kg

## WATER CONNECTION

Fixed water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80-800 kPa (0.8-8.0 bar)
Flowrate	>0.1l/sec
Water temperature	<25°C
Total hardness	4-8 °dH GH (German total hardness) / 7-14 °fH GH (French total hardness) / 70-140 ppm (mg/l)
Carbonate hardness	3-6 °dH KH (carbonate hardness) / 50-105 ppm (mg/l)
Acid content/pH value	6.5-7.5 pH
Chlorine content	<0.5 mg/l

## WATER DRAIN

Drain hose	Dia. = 16 mm, L = 2000 mm
------------	---------------------------

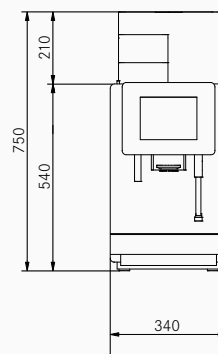

# YOUR S700: CONFIGURED TO YOUR PREFERENCES

## ADD-ON UNIT


### 2 CUP WARMER

Electrical connection

CW

220-240 VAC, 1L N PE, 110-130W, 50-60 Hz  
110-127 VAC, 1L N PE, 80-130W, 50-60 Hz  
100 VAC, 1L N PE, 80W, 50-60 Hz  
220 VAC, 1L N PE, 110W, 50-60 Hz  
approx. 20 kg  
Black or anthracite

Weight (empty)  
Colors

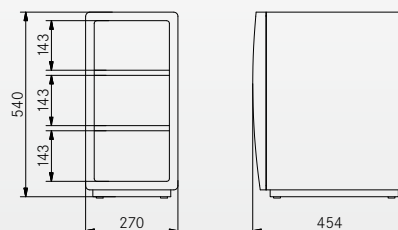

### 1 S700 OPTIONS

- First shot
- Coffee grounds ejector
- Raised feet (100 mm)
- Autosteam Pro (S3)  
(automatic milk foaming)

### 2 CUP WARMER

With four heatable trays.




MAKE IT WONDERFUL

Franke Kaffeemaschinen AG  
cs-info.ch@franke.com

Franke Coffee Systems GmbH  
cs-info.de@franke.com

Franke Coffee Systems Americas  
cs-coffeesales.us@franke.com

Franke Coffee Systems UK  
sales@Frankecoffeesystems.co.uk



coffee.franke.com