



WMF 1500 S+ (Easy Clean) Utility Hook-Up Specifications

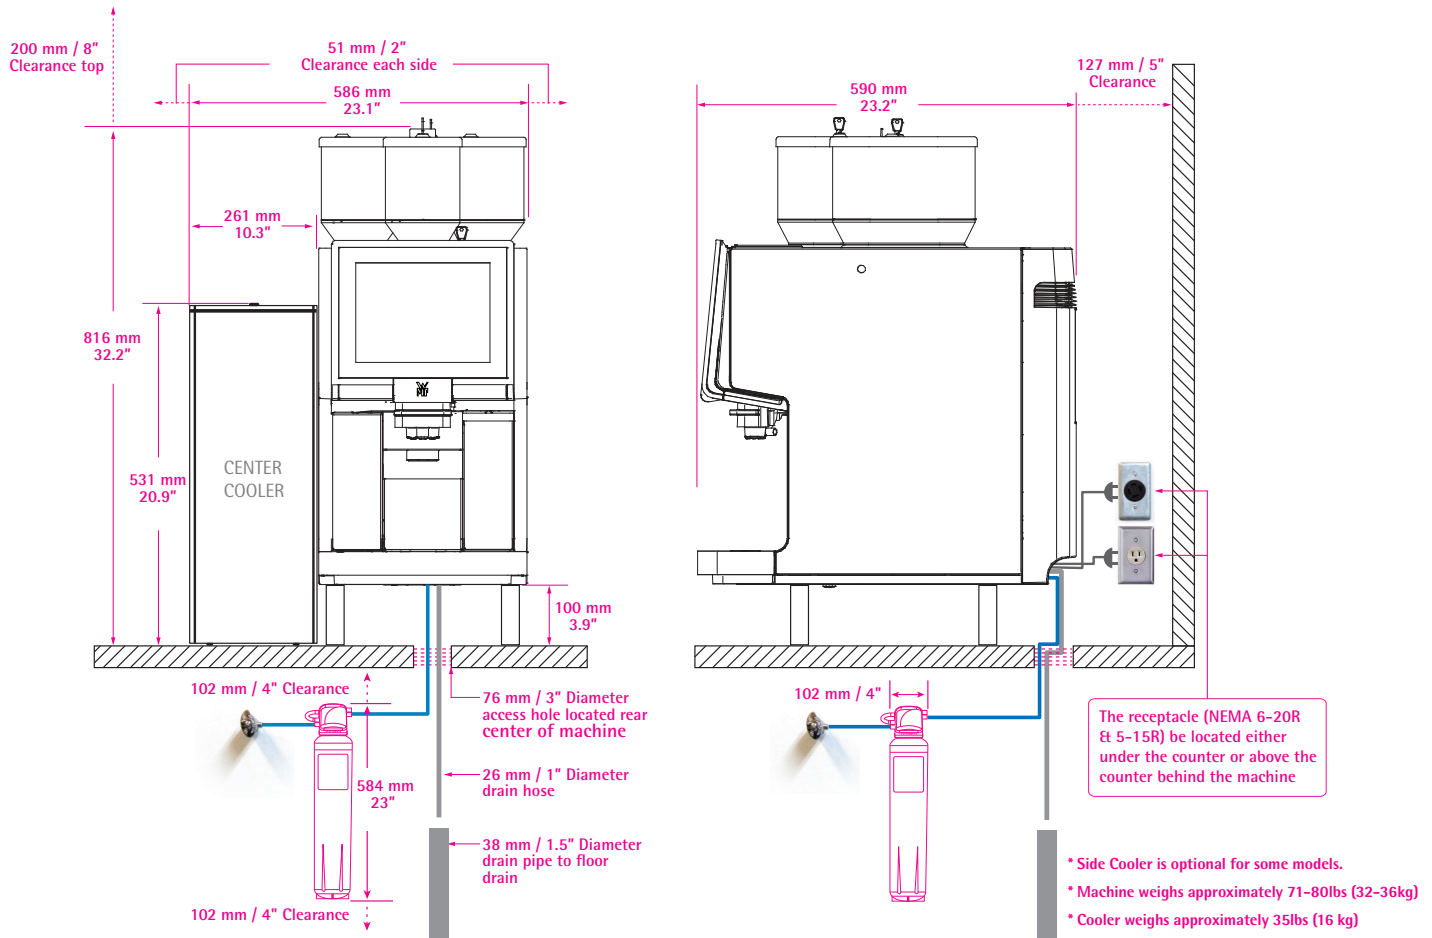

POWER, WATER SUPPLY, AND ACCESS REQUIREMENTS

Note: Access hole is only required if any of the utility hook-ups are located under the counter. Water shut-off valve and drain pipe only applies to fixed water connection and drain options.

| | |
|--|--|
| | <ul style="list-style-type: none"> Machine receptacle type: NEMA L6-20R Breaker panel: 20 Amp dedicated 220V single phase circuit Nominal Power ratings: 2.55kW / 3.2kW Power supply: 208V / 240V, 60 hz |
| | <ul style="list-style-type: none"> Cooler receptacle type: NEMA 5-15R |
| | <ul style="list-style-type: none"> 3" diameter access hole with collar (no sharp edges) Located centrally behind machine for water, drain hose and electrical |
| | <ul style="list-style-type: none"> Water shut-off valve with 3/8" compression fitting Back flow preventer in accordance with local requirements Water pressure requirement between 29-87 PSI (2-6 bar) |
| | <ul style="list-style-type: none"> Drain pipe to floor drain Copper or PVC in accordance with local health codes and regulations Diameter: 1 1/2" or larger |

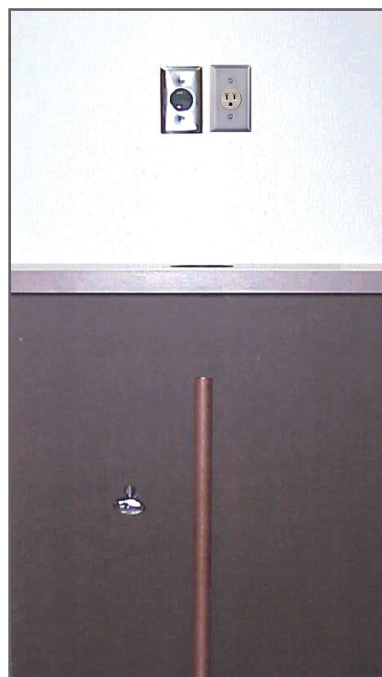

The receptacle, water shut-off valve and drain pipe must be within 3 feet (36") of the center of the location (footprint) of the machine.

Ideal under counter space for softener: 30" (minimum requirement: 28").