

GROOVE

Version

Wall 67 cm - 800 m³/h

Collection

Mirabilia

EAN code

8034122353340



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Scotch brite stainless steel (AISI 304)
Electronic control
LED lighting
Metallic grease filter, removable and washable
Charcoal filter included
Possible to duct wall mounted from rear

OPTIONAL ACCESSORIES

KACL.575#I
Extension H700 - Wall
KACL.576#I
Extension H960 - Wall
KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)
KACL.798#41F
Remote under-roof motor 950 m³/h
KACL.770#41F
Remote under-roof 1100 m³/h Brushless
KACL.786#41F
Outdoor extractor fan 1000 m³/h
KACL.796#4AF
Outdoor extractor fan 1500 m³/h
KACL.797#4AF
Remote under-roof motor 1300 m³/h

TECHNICAL FEATURES

Installation type
Wall
Dimensions
67 cm
Finishing
Scotch brite stainless steel (AISI 304)
Motor
800 m³/h
Type of control
Electronic control
Speed settings
4
Lighting
Led
Filter
Metallic filter "Base" - 277x294 mm - 2 pz
Charcoal filter
Round charcoal filter Ø170 mm - Type 6 - included
Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm


PACKAGING: WEIGHTS AND VOLUMES

Gross weight
24 kg
Net weight
20 kg
Volume
0,31 m³
Packaging size
Length
995 mm
Height
595 mm
Depth
530 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Current
220-240V
Frequency
50-60Hz
Plug type
Shuko

ENERGY CLASS
B



GROOVE

Version

Wall 67 cm - 800 m³/h


Collection

Mirabilia

EAN code

8034122353340

ENERGY LABEL

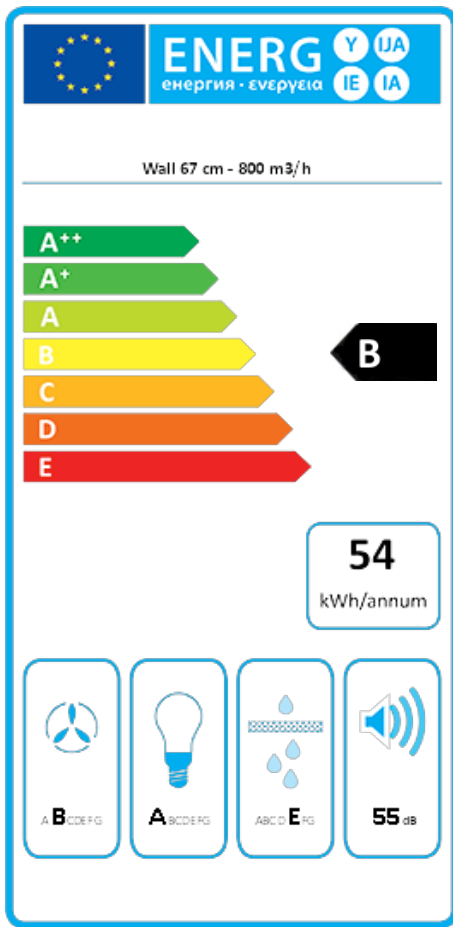

PF		
S	Falmec Spa	
M	Wall 67 cm - 800 m ³ /h	
AEC	53,9	kWh/a
ECC	B	
FDE	25,6	
FDEC	B	
LE	33,2	
LEC	A	
GFE	60,0	
GFEC	E	
Qmin	230,0	m ³ /h
Qmax	380,0	m ³ /h
Qboost	590,0	m ³ /h
SPEmin	45	dBa
SPEmax	55	dBa
SPEboost	64	dBa
PO	-	W
PS	0,60	W
PI		
F	1,1	
EEl	61,4	
Qbep	287,0	m ³ /h
Pbep	415	Pa
Qboost	590,0	m ³ /h
Wbep	129,0	W
WL	2,80	W
Emiddle	93	lux
Lwa-SPEmax	55	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.