

ELLITTICA

Version

Island 70 cm - 800 m³/h

Collection

Design+

EAN code

8034122306841



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Scotch brite stainless steel (AISI 304) brilliant finishing in the lower frame
Etched tempered extra light glass
Perimeter suction
Electronic control
Neon lighting
Metallic grease filter, removable and washable
Charcoal filter included

OPTIONAL ACCESSORIES

KACL.798#41F
Remote under-roof motor 950 m³/h
KACL.770#41F
Remote under-roof 1100 m³/h
Brushless
KACL.786#41F
Outdoor extractor fan 1000 m³/h
KACL.796#4AF
Outdoor extractor fan 1500 m³/h
KACL.797#4AF
Remote under-roof motor 1300 m³/h

TECHNICAL FEATURES

Installation type
Island
Dimensions
70 cm
Finishing
Etched tempered extra light glass
Scotch brite stainless steel (AISI 304) brilliant finishing in the lower frame
Motor
800 m³/h
Type of control
Electronic control
Speed settings
4
Lighting
Neon 2x8 W
Filter
Metallic filter "Air Falmec" - Wall 278x301 mm - 2 pz
Charcoal filter
Round charcoal filter Ø170 mm - Type 6 - included
Minimum distance
Gas hob: 63 cm
Electric hob: 52 cm

PACKAGING: WEIGHTS AND VOLUMES


Gross weight
46 kg
Net weight
39 kg
Volume
0,75 m³
Packaging size
Length
1070 mm
Height
870 mm
Depth
810 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
320 W
Current
220-240V
Frequency
50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
700 m³/h
I.E.C. 61591
Maximum noise
65 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
510 Pa
Maximum power motor
224 W
ENERGY CLASS
B

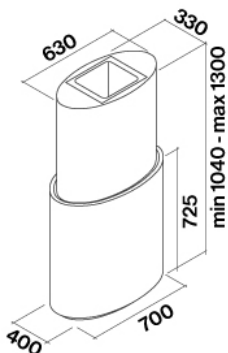

ELLITTICA

Version

Island 70 cm - 800 m³/h

Collection

Design+


EAN code

8034122306841

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
Noise dB(A)re1pW-I.E.C.60704-2-13	45	52	57	65
Capacity (m3/h) I.E.C.61591 Tubazioni normalizzate	270	370	470	700
Maximum pressure (Pa)	390	440	490	510
Power motor (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

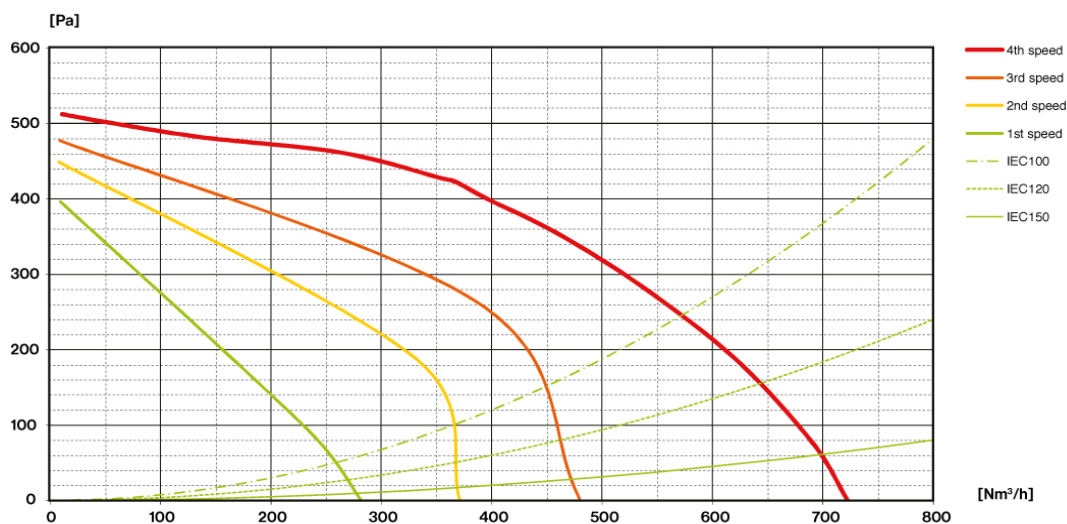

ELLITTICA

Version

Island 70 cm - 800 m³/h


Collection

Design+

EAN code

8034122306841

ENERGY LABEL

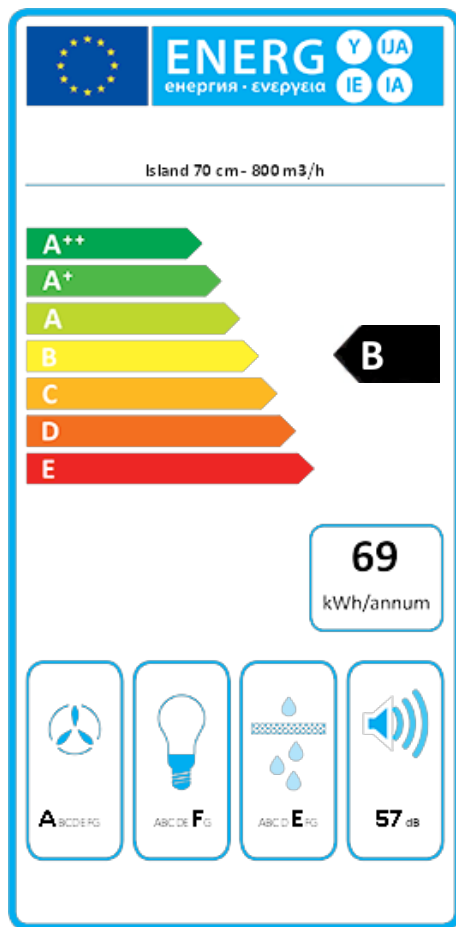

PF		
S	Falmec Spa	
M	Island 70 cm - 800 m ³ /h	
AEC	68,8	kWh/a
ECC	B	
FDE	28,1	
FDEC	A	
LE	5,2	
LEC	F	
GFE	62,0	
GFEC	E	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	700,0	m ³ /h
SPEmin	45	dBa
SPEmax	57	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	1,0	
EEl	63,0	
Qbep	366,0	m ³ /h
Pbep	423	Pa
Qboost	700,0	m ³ /h
Wbep	153,0	W
WL	17,80	W
Emiddle	93	lux
Lwa-SPEmax	57	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.