


## PANEL-306 WHT TRIO Panel Light



### Description

25W LED Panel light. White frame, opal diffuser. These are ideal as ceiling light for T-BAR ceilings, or by using a plaster recessed frame, ideal as a kitchen light, laundry light, etc. Now with TRIO, the added option of changing the colour temperature output of the panel with a dip switch function attached to the cable of the fitting.

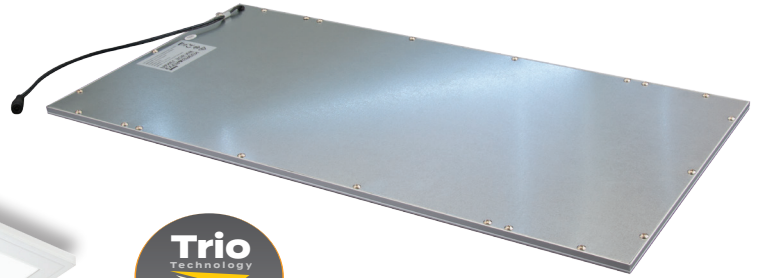

### Specification Features

Input Voltage:	240VAC
Power (W):	25W
IP rating (IP):	44
Lumens (lm):	Warm White 3000K - 2200lm Neutral White 4000K - 2300lm White 5700K - 2350lm
LED type:	High efficiency SMD LED
CCT:	3000K - 4000K - 5700K (Switchable)
CRI:	≥80
Dimmable:	No
Mounting Type:	Recessed into standard grid ceiling or via optional plaster trim kit for plaster board ceilings or via optional wire suspended or surface mounted kit.
Lifespan (hrs):	40,000hrs
Dimensions:	(L) 595mm x (W) 295mm x (H) 10mm


*\*DISCLAIMER: Please note our Three Year Warranty does not cover discolouration of the diffuser. Please see Instruction Manual for further details.*

Order Code: 17607  
Product Code: PANEL-306-WHT-TRIO  
Colour: White frame - 3000K-4000K-5700K (Switchable)



#### LED Panel Trim (Recessed Plaster Frame)

Product code: TRIM306-W  
Order code: 19325

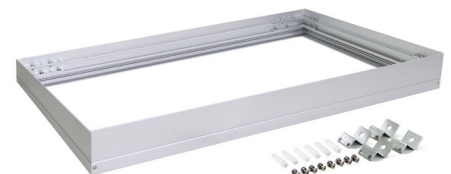


#### LED Panel Frame (Surface Mount Frame)

Product code: SM-KIT306-A  
Order code: 19329  
Colour: Aluminium Anodised

Product code: SM-KIT306-W  
Order code: 19333  
Colour: Satin White

### Diagrams / Additional

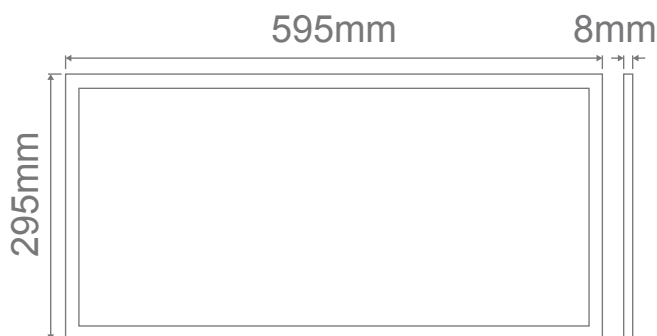

## PANEL-306 Panel Light



### Description

36W LED Panel light. Natural anodised aluminium frame, opal diffuser. These are ideal as ceiling light for T-Bar ceilings, or by using a plaster recessed frame, ideal as a kitchen light, laundry light, etc. Fully dimmable with Domus dimmer series.



### Specification Features

Input Voltage:	240VAC
Power (W):	36W
IP rating (IP):	44
Lumens (lm):	Warm White 3000K - 2200lm Neutral White 4000K - 2300lm White 6000K - 2350lm
LED type:	High efficiency SMD LED
CCT:	3000K - 4000K - 6000K
CRI:	≥80
Dimmable:	Yes*
Mounting Type:	Recessed into standard grid ceiling or via optional plaster trim kit for plaster board ceilings or via optional wire suspended or surface mounted kit.
Lifespan (hrs):	50,000hrs
Dimensions:	(L) 595mm x (W) 295mm x (H) 10mm


\* Tested on the Domus dimmer series. May work on other but not tested.

Product code:	PANEL-306-SLR-WW
Order code:	19308
Colour:	Warm White LED 3000K
Product code:	PANEL-306-SLR-NW
Order code:	19307
Colour:	Neutral White LED 4000K
Product code:	PANEL-306-SLR-W
Order code:	19306
Colour:	White LED 6000K



#### LED Panel Trim (Recessed Plaster Frame)

Product code:	TRIM306-W
Order code:	19325

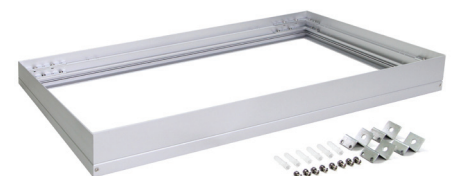

#### LED Panel Frame (Surface Mount Frame)

Product code:	SM-KIT306-A
Order code:	19329
Colour:	Aluminium Anodised

Product code:	SM-KIT306-W
Order code:	19333
Colour:	Satin White

### Diagrams / Additional

