


RAZOR SERIES

240V LED SLIMLINE LOW PROFILE BATTEN FITTINGS

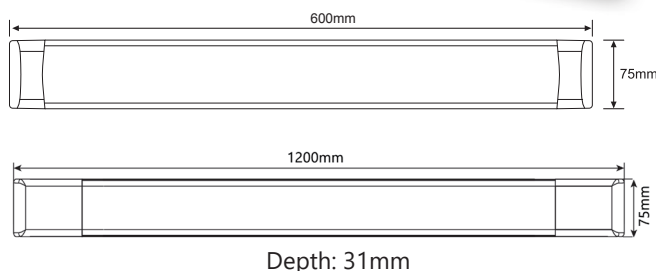

PRODUCT FEATURES

- Input voltage: 220-240V AC 50/60Hz
- Constructed of aluminium with PC diffuser
- Wattage: 18W & 36W
- Power factor: 0.9
- SMD2835 LED chips
- Inbuilt driver included
- Ambient temperature: -20 to 40°C
- Compatible with 3 wire motion & microwave sensors
- Dimmable models are available
- Also RAZORMBX available(optional) for external mounted support



▼ RAZOR1D, RAZOR2D, RAZOR5, RAZOR6

Central hole in back plate

PART NO.	DESCRIPTION	KELVIN	LUMENS	CRI	WATT	WEIGHT (KG)	BOX (CM)	CARTON QTY
CLIP MOUNTED WITH EXTERNAL TERMINAL BLOCK + CABLE								
RAZOR3A	BATTEN LED S/M WH 3000K 18W 160D 600mm 2FT	3000K	1600LM	82	18	0.56	67x8x4	10
RAZOR4A	BATTEN LED S/M WH 3000K 36W 160D 1200mm 4FT	3000K	2900LM	82	36	1.00	127x8x4	10
*Complete with in built terminal block and central cable access (screw mounted)								
*RAZOR5	BATTEN LED S/M WH Central Hole 5000K 18W 160D 600mm 2FT	5000K	1450LM	82	18	0.428	61x8x3.3	10
*RAZOR6	BATTEN LED S/M WH Central Hole 5000K 36W 160D 1200mm 4FT	5000K	2950LM	82	36	0.795	121x8x3.3	10
DIMMABLE VERSION								
*RAZOR1D	BATTEN DIMM LED S/M WH 5000K 20W 160D 600mm 2FT	5000K	1650LM	82	18	0.48	61x8x4	10
*RAZOR2D	BATTEN DIMM LED S/M WH 5000K 36W 160D 1200mm 4FT	5000K	2950LM	82	36	0.86	121x8x4	10
RAZORMBX	BATTEN LED S/M EXTERNAL M/BRACKETS X 2							

Recommended dimmers (for RAZOR1D,2D):

BRAND	CODE	QTY OF LAMPS
CLA	LYNX	6PCS OF RAZOR1D 3PCS OF RAZOR2D
CLA	VELA	
CLIPSAL	32E450UDM	
CLIPSAL	32ELEDM	
DIGINET	MMDM/PB	
DIGINETE	MMDM/RT	
HPM	CAT400T	



UPDATED ON 16/11/2017

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au



Follow us: facebook.com/CLALighting