



OmniAire 600V

Omnitec Design, Manufacturing Air Purification Equipment Since 1988

Air scrubber for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. Accessories include HEPA filter, activated carbon filters and germicidal UV-C light for removal of asbestos, lead, chemical fumes and biological contaminants. Provides cleaner and healthier environment at construction/renovation projects and industrial facilities.

OmniAire 600V

SPECIFICATIONS


Net Weight With Filters	55 lbs.
Dimensions (LxWxH)	30.5"x14"x18.5"
Operating Speeds	Variable
Airflow Ratings (cfm)*	150 to 600
Filtration Stages	3 to 4
HEPA Filter 99.97%, 0.3µ	Yes
Cabinetry	Aluminum, silicone sealed before riveting
Exhaust Collar Diameter	8"
Carrying Handles w/Rubber Grips	2
3" Casters	4 Swivel
Motor With Thermal Overload	1/4 hp
Circuit Requirements (Volts/Hz)	115V/60Hz
Maximum Operating Amps	3.5 amps
Pressure Gauge	0-3" W.C.

*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.



ORDERING INFO.....PART

OmniAire 600V.....	OA600V
HEPA Filter 99.97%, 0.3µ	MFH12
Primary/Secondary Filter (qty 20)	MFP1313
Intake Manifold, 8"	MFIM8
Quick Clamp, 8 to 10"	QCW12
Flexible Duct, 8" x 25'	MD8
OdorGuard 600 Carbon Filter	OG1212
UVGI Germicidal Light Module	UVCM600
UV-C Emitter Tube, 6½" J	EUV65JD

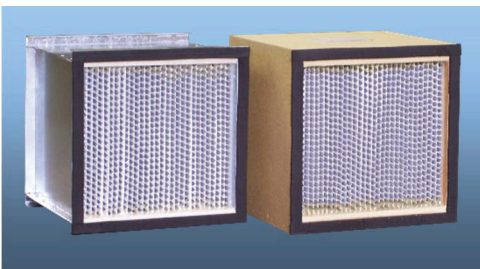

The OmniAire 600V comes standard with a particle board 99.97% 0.3µ HEPA filter and can be upgraded to a metal frame Certified 99.99% 0.3µ HEPA.



Optional Accessories



CONFORMS TO UL STD 507
 CERTIFIED TO CAN/CSA STD
 C22.2 NO. 113-M1984

www.nikomedusa.com
 2000 Pioneer Road, Huntingdon Valley, PA 19006
 phone 800-355-NIKO fax 215-443-8990