


## IN-CAR CONNECTIVITY

### Installation


Connect the black wire to ground and the red wire to a switched 12v power source.

*Note: If the application is in an environment where moisture could be present, the marine grade heat shrink tubing should be placed over the power wires prior to connecting. Once connections are made, move the tubing over the connection and apply heat.*

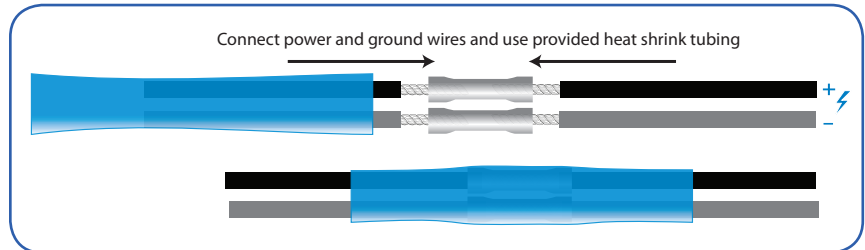

Plug the audio connections into the radio or amplifier, using the RCA to 3.5mm adapter if necessary. Repeat heat shrink method as used in the first step.

Secure the MusicStream to a safe and hidden location trying to avoid metal cages or large metal shields.

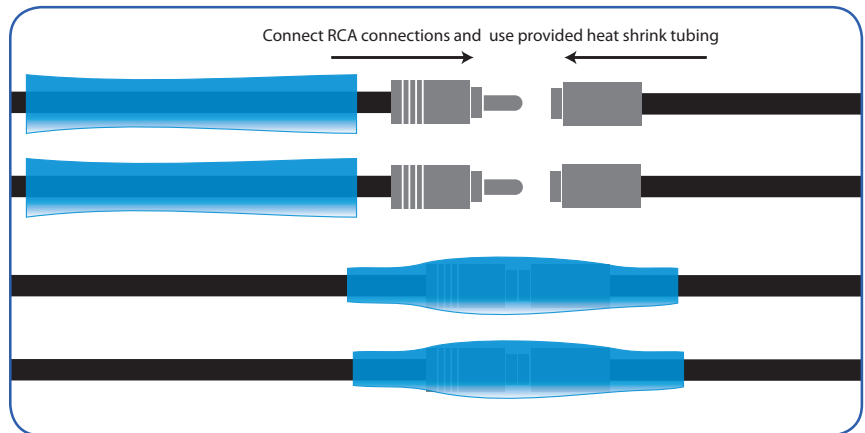

### Pairing and Operation

Start the vehicle or turn the key to the on position to power up the MusicStream. Using the smartphone or portable audio device, scan for available Bluetooth devices. Select "MusicStream" from the list. Once connected, start playing music.

*Note: The MusicStream will automatically re-connect to the paired device when returning to the vehicle for future use.*

#### WARNING:

This equipment may be reset by unintentional electrostatic discharge during operation. Exposure to direct sunlight or extreme heat may cause damage or malfunction.

FCC Class B Radio Frequency Interference Statement This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Re-orientate or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that of which the receiver is connected.
4. Consult the dealer or an experienced radio / television technical for help.

Notice : The changes or modifications not expressly approved by the party responsible compliance could void the user authority to operate the equipment.