



PD1210 RACKMOUNT POWER DISTRIBUTION

KEY FEATURES

2 Pole Line/Neutral Switching of Outlets for AS/NZS3002:2021 Compliance

Neutral and Earth Fault Indication

Power Available Indication

5 Pin 56 Style 32A Supply Plug

Type A 30mA RCBO Protection per Circuit

4 Pole Protection and Isolation of Incoming Supply

Visual Phase Identification for Ease of Phase Loading

Earthing Terminal for Ease of PAT Testing

Standard 3RU 19" Rack Mountable

Heavy Duty Rubber 6mm² Supply Cable


Designed, Engineered and Assembled in Australia

AS/NZS 62368.1:2022 AV & IT Compliance

AS/NZS 3002:2021 Shows and Carnivals Compliance



REAR PANEL CONNECTIONS

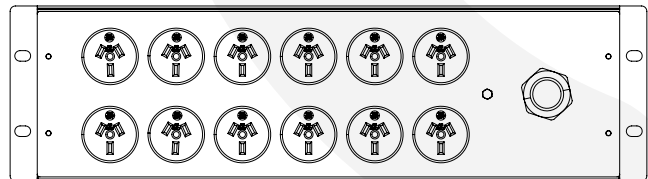

Number of Circuits	12
Output Capacity Per Circuit	10A
Number of Outputs per Circuit	1
Output Connector Type	12 x 10A AU GPO
Master Isolator	4-Pole 32A MCB, C-Curve
Circuit Protection	1P+N 10A, Type A, C Curve RCBO
Supply Cable	1.7m, 5x6mm ² Heavy Duty Flexible Rubber
Supply Connector	5-Pin 32A 3-Phase, 380-415V 50Hz 3P+N+PE
Input Power Indicator	YES
Neutral Fault Indicator	YES
Earth Fault Indicator	YES
19" 3RU Rackmount	YES
Dimensions (WxHxD)	525mm x 215mm x 505mm
Weight	10.3kg
Warranty	6 Year Limited