



PD616 RACKMOUNT POWER DISTRIBUTION

KEY FEATURES

2 Pole Line/Neutral Switching of Outlets for AS/NZS3002:2021 Compliance

Neutral and Earth Fault Indication

Power Available Indication

5 Pin 56 Style 32A Supply Plug

Type A 30mA RCBO Protection per Circuit

4 Pole Protection and Isolation of Incoming Supply

Visual Phase Identification for Ease of Phase Loading

Earthing Terminal for Ease of PAT Testing

Standard 3RU 19" Rack Mountable

Heavy Duty Rubber 6mm² Supply Cable


Designed, Engineered and Assembled in Australia

AS/NZS 62368.1:2022 AV & IT Compliance

AS/NZS 3002:2021 Shows and Carnivals Compliance



REAR PANEL CONNECTIONS

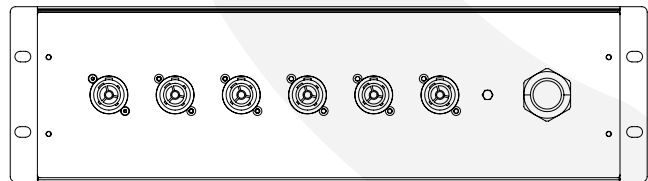

| | |
|--------------------------------------|---|
| Number of Circuits | 6 |
| Output Capacity Per Circuit | 16A |
| Number of Outputs per Circuit | 1 |
| Output Connector Type | 6 x powerCON TRUE1 TOP |
| Master Isolator | 4-Pole 32A MCB, C-Curve |
| Circuit Protection | 1P+N 16A, Type A, C Curve RCBO |
| Supply Cable | 1.7m, 5x6mm ² Heavy Duty Flexible Rubber |
| Supply Connector | 5-Pin 32A 3-Phase, 380-415V 50Hz 3P+N+PE |
| Input Power Indicator | YES |
| Neutral Fault Indicator | YES |
| Earth Fault Indicator | YES |
| 19" 3RU Rackmount | YES |
| Dimensions (WxHxD) | 525mm x 215mm x 505mm |
| Weight | 9.2kg |
| Warranty | 6 Year Limited |