



	5MP@25fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support CVBS input</b>	
Audio Input	1-ch, RCA	
Audio Compression	G.711U	
<b>Video/Audio Output</b>		
CVBS Output	1-ch, BNC	
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	4K(3840X2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	
Synchronous Playback	16	
Live view display	HDMI/VGA: 1/4/6/8/9/16/25/36	
Two-way Audio	1-ch, RCA	
<b>Snapshot</b>		
FTP/Schedule/Event Snapshot	32-ch snapshot, up to 704*576 resolution	
<b>Network</b>		
Incoming Bandwidth	80Mbps (Up to 144Mbps after all analog channel conversion)	
Outgoing Bandwidth	160Mbps	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP	
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome(version 45 and above) for Windows Edge(version 79 and above) for Windows	
<b>Encoding</b>		
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /1080P/720P/D1	
Recording Frame Rate	<b>Main stream</b>	<b>Sub stream</b>
	8MP Lite@8fps	D1@8fps
	5MP Lite@12fps	D1@12fps
	4MP Lite@15fps	D1@15fps
	1080P@15fps	D1@15fps
	720P@30fps	D1@30fps
Audio Sample Rate	8KHz,16 bit per channel	
Audio Bit Rate	64Kbps per channel	

**Decoding**

Capability	Analog: 16 x 8MP Lite@8, 16x 5MP Lite@12, 16x 4MP Lite@15, 16 x 1080P@15, 16 x 720@30 IP: 16 x 720P@30, 8 x 1080P@30, 4 x 4MP@30, 2 x 8MP@30
------------	---

**Hard Disk**

SATA	2 SATA interfaces
Capacity	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)

**Smart Alarm**

VCA Detection	Ultra Motion Detection(UMD) for analog:16-ch
VCA Search	Face Snapshot Search, Behavior Search, People Counting Report

**General Alarm**

General Alarm	Motion Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal

**External Interface**

Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0
Serial Interface	1 x RS485
Alarm In	4
Alarm Out	1


**General**

Power Supply	12V DC Power Consumption: ≤ 38 W( without HDD )
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	380mm ×326mm× 53mm (15.0" × 12.8"×2.1")
Weight ( without HDD )	≤2.6 Kg ( 5.72lb )


**Certification**

Certification	UL /CE /FCC /RoHS /WEEE
---------------	-------------------------

## Dimensions

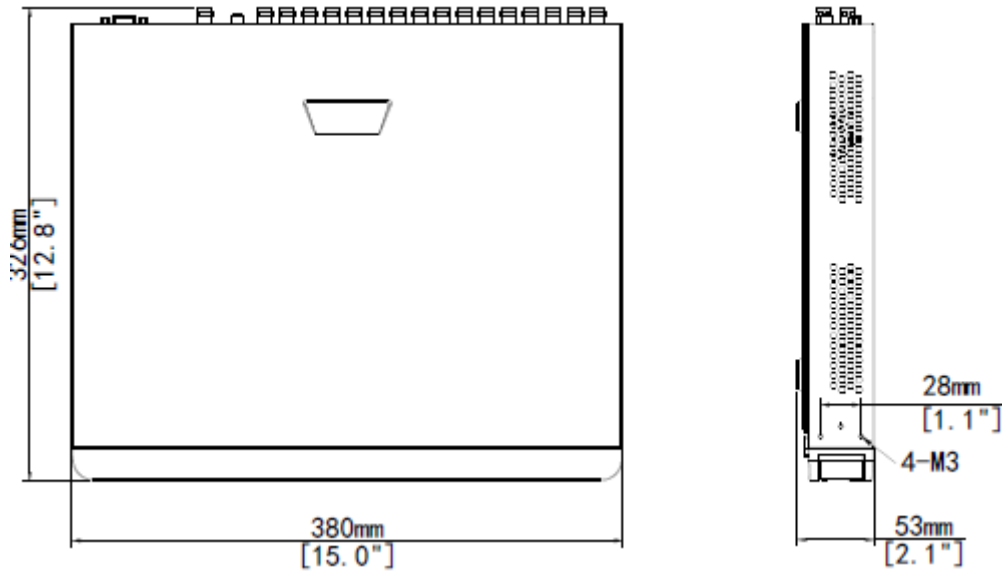

## Rear Panel

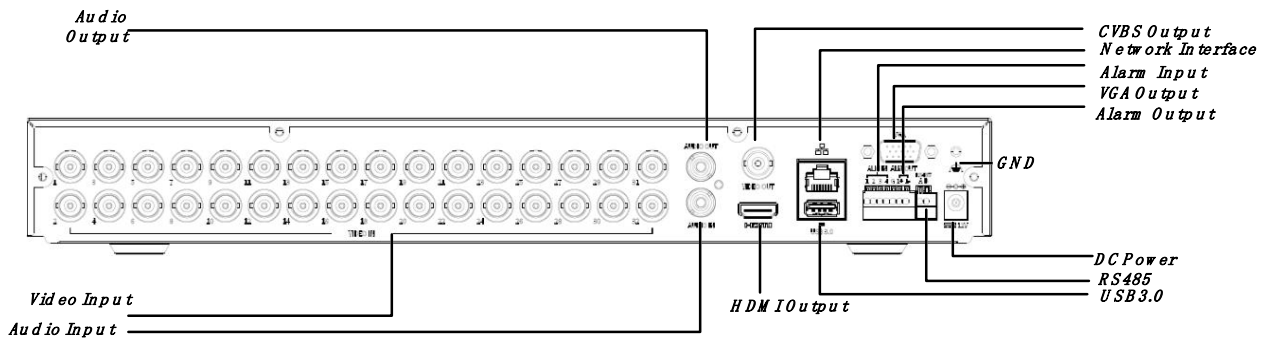

**Zhejiang Uniview Technologies Co., Ltd.**

No.369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\* Product specifications and availability are subject to change without notice.