



Ready

302 G



Dynamic Carpigiani Technology allows you to heat and batch freeze mixtures to produce the best Gelato, Sorbetto, lowoverrun desserts & frozen pastries



Performance Mix, heat and freeze in the same cylinder. Hard-O-Tronic technology: automatic consistency control to determine when the product is complete. POM Beater resists extreme hot and cold temperatures and includes auto-adjusting scrapers for complete extraction. Post Cooling ensures frozen dessert is cold upon extraction.



Convenience Water filling capability delivers the precise amount of water required for mixtures and cleaning functions, saving time and avoiding dosage errors. Intuitive control panel is accessible even while adding mix. Operations are done standing up for user comfort. Shelf mat is designed to hold both trays and tubs during extraction. Crystal setting can be used to create frozen pastries, mono portions and packaged servings with optional dispensing door.



Savings

Ready technology makes it possible to complete entire Gelato production process in just one machine.




Safety TEOREMA guarantees facilitated assistance by providing on-line monitoring and diagnosis on a tablet, phone or PC wherever you are. Automatic defrost starts during power outages to avoid damage to beater. Rounded corners reduce risk of injury to operator.



Hygiene Cleaning is easier thanks to high temperature cleaning cycle and removable extraction chute. The cylinder and front panel is continuous stainless steel for maximum cleanliness and hygiene. Scotch-Brite treated steel is resistant to stains and fat residues. "Postponed cleaning" program guarantees hygienic safety even during prolonged production stand-by due to washing out remaining product residuals left at the end of the batch freezing cycle. Ask your Carpigiani dealer for the "Carp Care Kit" to best maintain your Ready model.



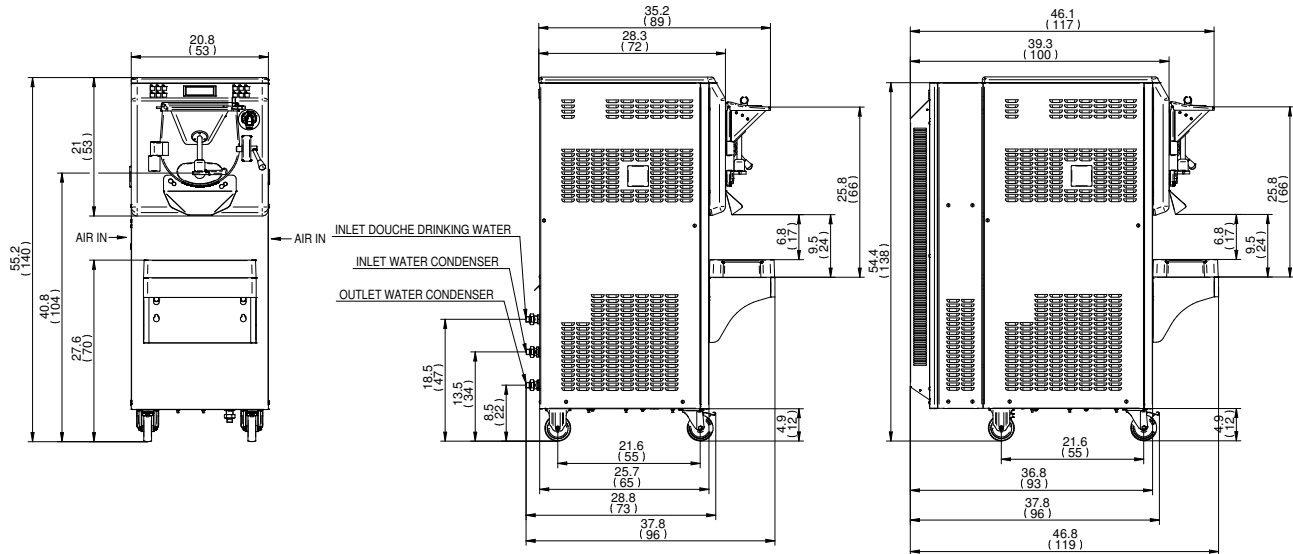

	WATER		AIR	
Weights	lbs.	kgs.	lbs.	kgs.
Net	705.5	320	783	355
Crated	763	346	842	382
Volume	cu. ft.	cu. m.	cu. ft.	cu. m.
Volume	42.65	1.30	45.93	1.40
Dimensions	in.	cm.	in.	cm.
Width	20.8	53	20.8	53
Depth	28.3	72	39.3	100
Height	55.2	140	55.2	140
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)	
208-230/60/3 Water	55	55	3P, 3W	
208-230/60/3 Air	55	55	3P, 3W	

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

Beater Motor

4.6 HP

Refrigeration System

R404A

Water Cooled

Water inlets and drain connections in the rear 1/2" MPT

Air Cooled *

Minimum clearance: 6" (15 cm) on both side panels and 0" (0 cm) from the rear panel for proper air circulation.

Cylinder Capacity

15 quarts (14 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. * Room temperature 68°F (20°C).

Bidding Specs

Electrical Volt _____ Hz _____ Ph _____ Neutral Yes No Cooling Air Water

Options _____



3760 Industrial Drive
Winston Salem - NC
27105
Toll free (800) 648 4389

Dealer



carpigiani-usa.com

an Ali Group Company



The Spirit of Excellence



Ready

302 G TRU



Dynamic Carpigiani Technology allows you to heat and batch freeze mixtures to produce the best Ice Cream, Gelato, Sorbet, Sherbet, Frozen Custard, Water Ice and more...



Performance Mix, heat and freeze in the same cylinder. Hard-O-Tronic technology: automatic consistency control to determine when the product is complete. POM Beater resists extreme hot and cold temperatures and includes auto-adjusting scrapers for complete extraction. Post Cooling ensures frozen dessert is cold upon extraction. Includes two separate beaters for Ice Cream and Gelato production.



Convenience Water filling capability delivers the precise amount of water required for mixtures and cleaning functions, saving time and avoiding measuring errors. Intuitive control panel is accessible even while adding mix. Operations are done standing up for user comfort. Shelf mat is designed to hold both trays and tubs during extraction. Crystal setting can be used to create frozen pastries, mono portions and packaged servings with optional dispensing door.



Savings

Ready technology makes it possible to complete the entire Frozen Dessert production process in just one machine.




Safety TEOREMA guarantees facilitated assistance by providing on-line monitoring and diagnosis on a tablet, phone or PC wherever you are. Automatic defrost starts during power outages to avoid damage to the beater. Rounded corners reduce risk of injury to operator.



Hygiene Cleaning is easier thanks to the high temperature cleaning cycle and removable extraction chute. The cylinder and front panel is continuous stainless steel for maximum cleanliness and hygiene. Scotch-Brite treated steel is resistant to stains and fat residues. "Post-poned cleaning" program guarantees hygienic safety even during prolonged production stand-by due to washing out remaining product residuals left at the end of the batch freezing cycle. Ask your Carpigiani dealer for the "Carpi Care Kit" to best maintain your Ready model.



Ready 302 G TRU

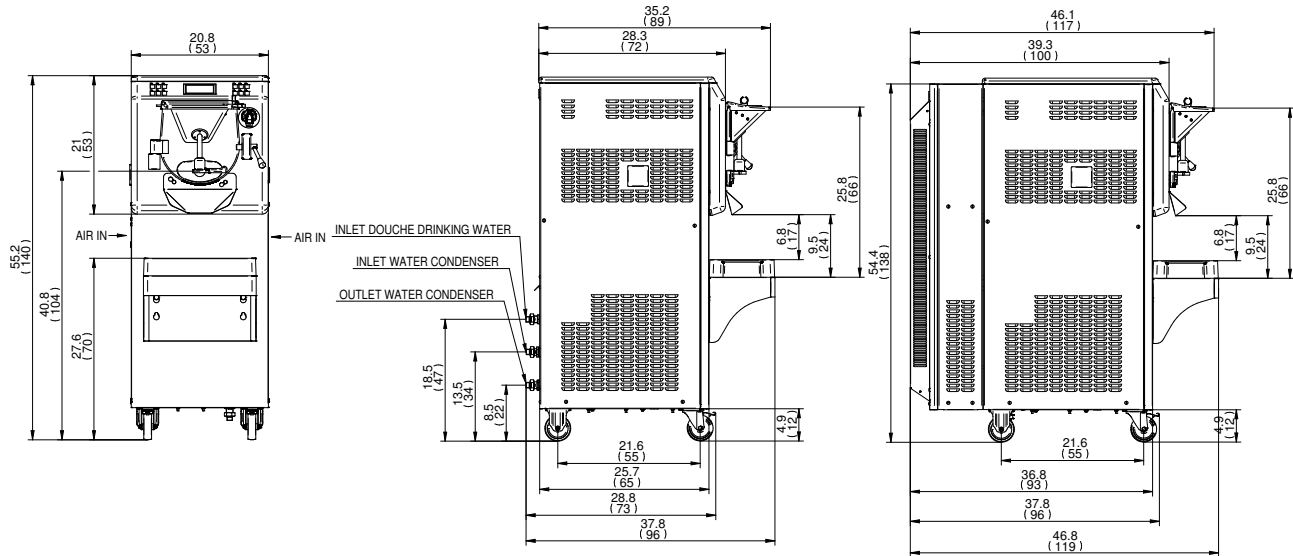

WATER AIR

Weights	lbs.	kgs.	lbs.	kgs.
Net	705.5	320	783	355
Crated	763	346	842	382
Volume	cu. ft.	cu. m.	cu. ft.	cu. m.
Volume	42.65	1.30	45.93	1.40
Dimensions	in.	cm.	in.	cm.
Width	20.8	53	20.8	53
Depth	28.3	72	39.3	100
Height	55.2	140	55.2	140
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P)	Wires (W)
208-230/60/3 Water	55	55	3P, 3W	
208-230/60/3 Air	55	55	3P, 3W	

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

Beater Motor

4.6 HP

Refrigeration System

R404A

Water Cooled

Water inlets and drain connections in the rear 1/2" MPT

Air Cooled *

Minimum clearance: 6' (15 cm) on both side panels and 0" (0 cm) from the rear panel for proper air circulation.

Cylinder Capacity

15 quarts (14 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. * Room temperature 68°F (20°C).

Bidding Specs

Electrical Volt _____ Hz _____ Ph _____ Neutral Yes No Cooling Air Water

Options _____



3760 Industrial Drive
Winston Salem - NC
27105
Toll free (800) 648 4389

Dealer



carpigiani-usa.com

an Ali Group Company



The Spirit of Excellence